
LOW VOLTAGE AC DRIVES

ABB general purpose drives

ACS580, 0.75 to 500 kW



**Get it fast.
Use it easily.
Improve your processes.
ACS580: general purpose drives
you can trust.**

Table of contents

04–05	The all-compatible ACS580 series
06–07	Easily take full control of your processes to comprehensively manage your plant
08–09	Typical industries and applications
10–11	Complete offering, from wall-mounted drives to cabinet installations
12	Common features throughout the whole ACS580 product family
13	Standard ACS580 drives software with ersatile features
14	Standard interface and extensions for plug-in connectivity
15	How to select a drive
16	Technical data
18–19	Dimensions
20–22	Ratings, types and voltages
24	Easiness on a whole new level
25	Control panel options and mounting kits
26	Door mounting and daisy chaining
28–29	Higher enclosure class for cabinet-free installations even in harsh conditions
30–31	ACS580-07 cabinet-built drives
32–33	Commissioning, programming and customization tools
34–35	Communication and connectivity
36–37	Safety options
38–39	ABB Ability™ Condition Monitoring for drives
40–41	EMC – electromagnetic compatibility
42–43	Harmonic mitigation
44–45	For explosive atmospheres
46–47	Cooling and fuses
48	Circuit breakers
49	du/dt filters
50	Sine filters
51	ACS580 drives are compatible with the wide ABB product offering
52	ABB Ability™ smartphone apps
54–55	We keep your world turning
56	A lifetime of peak performance
57–58	Ordering information

The all-compatible ACS580 series

Effortless process automation

The ACS580 is an all-compatible ABB general purpose drive, offered in a range of wall-mounted drives, drive modules and cabinet-built drives. It turns complicated to simple and controls processes productively and efficiently.

One product, many applications

ACS580 drives include all the essential components for typical light industry applications, with a scalable offering from 0.75 kW to 500 kW. The drive is ready to control compressors, conveyors, mixers, pumps and fans, as well as many other variable and constant torque applications. The all-compatible drives family ensures that you will always find the best drive for your needs. These drives share a similar user interface and PC tools, making using and learning them fast and easy.

The drive controls a wide range of applications in different industries, and yet it requires very little setting up or commissioning.

Reliability and consistent high quality


ACS580 drives are designed for customers who value high quality and robustness in their applications. The product features, such as coated boards and compact IP55 enclosure, make the ACS580 suitable for harsh conditions also. Additionally, all ACS580 drives are tested at maximum temperature and with nominal loads. The tests include performance and all protective functions.

Easier than ever before

ACS580 drives have all the essential features built-in reducing the commissioning and set-up time. The assistant control panel with multiple language choices is standard in ACS580 drives. Users can also upgrade to an optional Bluetooth control panel for wireless commissioning and monitoring. Primary settings and application control macros ensure quick product setup.

Instant availability

ACS580 products are available from central stocks around the world for immediate delivery up to 500 kW. The product is also widely available from ABB distributors globally.

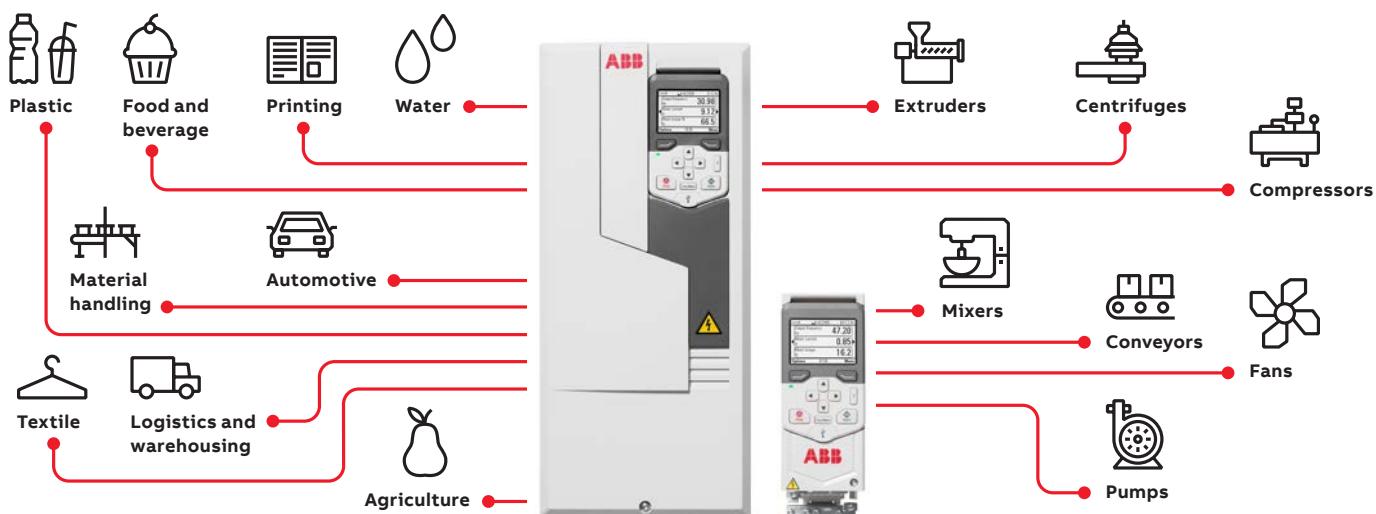



Easily take full control of your processes to comprehensively manage your plant

ACS580 drives are equipped with built-in features that simplify ordering and delivery, and reduce commissioning costs. Everything is provided in a single, compact and ready-to-use package for you to take full control of your processes.



Start-up and maintenance tool

Drive composer PC tool for startup, configuration, monitoring and process tuning. The PC tool is connected to the drive's control panel via a USB interface.



Simple to select, install and use

Built-in features such as an EMC filter, choke, a Modbus RTU fieldbus interface and safe torque off functionality simplify drive selection, installation and use.




Simplicity at your fingertips as standard

The control panel's straightforward primary settings menu with assistants help you set up the drive quickly and effectively.



Scalable performance

The ACS580 is a perfect match not only for energy-aware applications, but also for applications where sophisticated speed and torque control are needed.



Effortless automation and productivity
for your success



Communication with all major automation networks

Optional fieldbus adapters enable connectivity with all major industrial automation networks.



Reliable, integrated safety

The ATEX-certified thermistor protection module, Ex II (2) GD, CPTC-02 provides enhanced process safety and easy, simplified installation.



Adaptive programming

Adaptive programming is ideal for creating simple programs for various applications to further optimize the process control. It does not require expertise in programming.

Designed for maximum reliability

Design features such as coated circuit boards, minimized airflow through the control board section, and earth fault protection make the ACS580 a safe choice for multiple applications.



Remote monitoring

A built-in web server and stand-alone datalogger NETA-21 module enable worldwide and secure access to drives.

Typical industries and applications

ACS580 drives improve process performance, increase productivity, reduce external components and ensure machine and personnel safety



01



02



03



04



05



06



07



08



09

—
01 Food and beverage

—
02 Material handling

—
03 Printing

—
04 Rubber and plastics

—
05 Textile

—
06 Sawmill

—
07 Water handling

—
08 Agriculture

—
09 Automotive

Streamline your processes for profitable growth

Industry	Application	Customer benefits
Food and beverage 	Blowers, centrifuges, compressors, conveyors, fans, mills, pumps, separators, mixers, dryers, pelletizers	<ul style="list-style-type: none"> Accurate control of the process increases the speed of food production while saving energy and improving work safety. Precise speed and torque control increases production uptime even when the load varies. Increased starting torque with boost function allows the same drive series to be used in different applications in the manufacturing plant. Safe torque off (SIL 3) function ensures machine and personnel safety. The easy-to-use control panel with multiple languages and robust design reduce the time needed for maintenance. The ATEX-certified thermistor protection module, Ex II (2) GD meets the safety requirements even in dusty environments.
Material handling 	Conveyors	<ul style="list-style-type: none"> Accurate and precise speed and torque control increase production uptime even when the load varies. Safe torque off (SIL 3) function ensures machine and personnel safety. Minimized downtime with robust and reliable design. Swinging choke technology to mitigate harmonics. External +24 V supply to keep the communication up when the mains supply is disconnected.
Printing 	Compressors, presses, winders	<ul style="list-style-type: none"> Smooth acceleration to prevent breaking the paper. The robust design of the drive reduces mechanical stress on process line equipment, lowering maintenance costs and capital expenditure. Precise speed and torque control of applications increases process uptime by optimizing motor control.
Rubber and plastics 	Extruders, injection molding machines, pumps	<ul style="list-style-type: none"> Smooth acceleration to prevent breaking the web of plastic film. The scalable all-compatible platform allows easy process and component optimization with different drive types that share the same user interface and tools. Wide range of supported fieldbus protocols for easy PLC integration.
Textile 	Bleaching machines, compressors, conveyors, drum washers, extruders, fans, jet dyeing machines, pumps, stenter machines, stretchers, winders	<ul style="list-style-type: none"> Precise speed or torque control for high stretching accuracy and better quality of the end product. Adjustable torque limit to prevent damage to mechanical equipment. Adjustable acceleration/deceleration ramps to improve pump control. Real-time clock and timed functions for process optimization. Increased productivity and faster payback times with multiple setups, allowing production of two different products. Built-in counters for additional energy savings and preventive maintenance.
Sawmill 	Chippers, conveyors, feeders, dryers, pickers, drying kilns	<ul style="list-style-type: none"> IP55/UL type 12 available up to 250 kW for harsh environments. Cabinet-built drive IP54 up to 500 kW. Safe torque off (SIL 3) function ensures machine and personnel safety. External +24 V supply to keep the communications "alive" when the mains supply is turned off. ATEX-certified thermistor protection module, Ex II (2) GD.
Water handling 	Compressors, pump stations	<ul style="list-style-type: none"> Additional energy savings with energy optimizer function. Adjustable acceleration/deceleration ramps to improve pump control. Minimized downtime with robust and reliable design. ABB's extensive product and service offering for comprehensive process optimization.
Agriculture 	Fans, irrigators, pumps, sorters	<ul style="list-style-type: none"> IP55/UL 12 available up to 250 kW harsh environments. Wall-mounted power range up to 250 kW. Drive modules and cabinet-built drives up to 500 kW.
Automotive 	Conveyors, fans, pumps	<ul style="list-style-type: none"> ATEX-certified thermistor protection module, Ex II (2) GD. Increased productivity and faster payback times with multiple setups. Enhanced quality of end products with smooth control of the motor and process. Safe torque off (SIL 3) function ensures machine and personnel safety. Wide range of fieldbus networks supported, including PROFIBUS and PROFINET IO. P55/UL Type 12 available up to 250 kW 400 V and high enclosure rating for harsh environments. The robust design of the drive reduces mechanical stress on process line equipment, lowering maintenance costs and ensuring high production quality.

Complete offering, from wall-mounted drives to cabinet installations

Powerful, rugged and robust ACS580 drives ensure ease of use, scalability and quality. A wide power range and various mounting options and enclosure classes ensure you will find a drive for your installation and environment needs.

- 01 Wall-mounted ACS580 IP21 drive
- 02 Wall-mounted ACS580 IP55 drive
- 03 Flange-mounted ACS580 IP21 drive
- 04 ACS580 drive module with IP00
- 05 Cabinet-built ACS580 drive with IP42

Wall-mounted IP21 drives, standard

Wall-mounted IP21 drives are available in a power and voltage range from 0.75 to 250 kW and 3-phase 380-480 V. Side-by-side mounting, flange mounting and horizontal mounting are all available for wall-mounted ACS580 drives.



01

Wall-mounted IP55 drives, +B056

The IP55 drive is designed for applications exposed to dust, moisture, vibrations and other harsh environments. It is similar in size to the compact IP21 drives, which provides significant savings in space, maintenance, engineering, and material costs, as well as in setup and commissioning time.



02

IP20 drives without a conduit box for cabinet installations, +P944

The option code +P944 removes the conduit box from the frames R5-R9, making it easier to install the drive in compact cabinets with limited space. These IP20 units enable you to optimize the solution from cost and dimensioning point of view, and reduce waste. This option is also compatible with the flange mounting option for the frames R5-R9.



03

Flange mounting option, +C135

The flange mounting option enables smaller cabinets to be used as the backside of the drive is installed outside of the cabinet. This mounting method improves the cooling system and decreases the investment in the cabinets. The flange mounting option is compatible only with the standard IP21 units. It maintains the protection class of IP55 on the backside of the drive, while the front side of the drive is IP20. The option is also available as a loose item with an MRP code. If necessary, the conduit box can be removed from the frames R5-R9 with an option code +P944.

—
03

Flange mounting kit MRP codes	Frame size
3AXD50000105311	R1 (IP21)
3AXD50000105328	R2 (IP21)
3AXD50000105335	R3 (IP21)
3AXD50000031460	R4 (IP21)
3AXD50000031461	R5 (IP21)
3AXD50000018852	R6 (IP21)
3AXD50000018853	R7 (IP21)
3AXD50000018854	R8 (IP21)
3AXD50000018855	R9 (IP21)

Drive modules for cabinet installations,

IP00 and IP20 (+B051)

ACS580 drive modules are optimal for system integrators, cabinet builders or OEMs who want to optimize the cabinet design in the 250-500 kW range but do not want to compromise on easy installation, commissioning and maintenance.

3-phase 380-480 V.

—
04

Construction options for ACS580-04

Plus code	Description
+H370	Full-size cable connection terminals for input power cables
+OH371	Drive module without full-size output cable connection terminals
+OH534	No pedestal
+OP919	No cabinet installation ramp
+P906	Remote control board

—
05

Cabinet-built drives, IP21, IP42 (+B054) and

IP54 (+B055)

Cabinet-built drives are available with IP21 protection class as standard and IP42 and IP54 as options in frame sizes R6 to R11. The drives have a unique cooling arrangement even for harsh environments and a global cabinet design with a high quality standard. The power range is from 75 kW to 500 kW, and the voltage range is 3-phase 380-480 V.

Common features throughout the whole ACS580 product family



Standard ACS580 features

Choke and EMC

- Swinging choke technology mitigates harmonics
- Fulfils standard the EN61000-3-12 standard
- EMC C2 filter for R1-R9 allows safe installation in first environment
- EMC C3 and common mode filter for R10 and R11 allow safe installation in second environment
- Optional EMC C1 filter for R1-R5 ensures the best electro-magnetic performance for first environment. Available for option +E223 and +F316.

Scalar and vector control for process control

- Scalar control for effortless process control
- Vector control for accurate speed and torque control in demanding applications
- Support for induction, permanent magnet and synchronous reluctance motors (SynRM)

Extensive I/O connections

- The ACS580 features extensive I/O connections for flexible configuration in various applications
- Colored and bigger terminals for easy commissioning and diagnostics

Assistant control panel and primary settings

- The ACS-AP-S assistant control panel speaks your language
- USB interface for PC and tool connection
- Help button for problem-solving and immediate diagnostics

Integrated safe torque off (STO)

- Safe torque off for implementing safe machinery
- SIL 3, PL e

Brake chopper

- The brake chopper is built-in as standard for ACS580 frames up to R3. Braking control is integrated into ACS580 drives.
- Optional external brake chopper can be added for the frames R4-R9.

Performance

The ACS580 is suitable for various types of applications, including constant torque, linear and variable torque applications.



Shared features of the ABB all-compatible drives portfolio

Same user interface

The drives follow the same operation logic and yet, there is an optimal drive from the smallest water pump to the biggest cement kiln, and everything in the between. When you have learned to use one drive, it is easy to use other drives in the portfolio.

Same PC tools

Free Drive Composer entry available at www.abb.com.

Simple connectivity

- The ACS580 supports F-series fieldbus adapters used in the ABB all-compatible platform
- Mobile phone connectivity via the optional Bluetooth assistant control panel
- Fieldbus settings are made easy with the redesigned simple settings menu



The same parameter structure makes the all-compatible platform easy to use.

Standard ACS580 drives software with versatile features

Save commissioning and learning time with the assistant control panel's clear and intuitive user interface and different assistants.

Improve the performance of the motor and process with sophisticated process control in scalar and vector control modes. The drive supports a wide range of motors, including induction and permanent magnet motors.

Analyze and optimize the application with the load profile log, which shows how the drive is operating.


Reduce motor noise with spreading the switching frequencies over a user-specified range.

Reduce costs with the built-in and standalone process PID. It makes the ACS580 a self-governing unit requiring only an external process measurement. No external logic input from the control room is needed.

Scale up and customize the drive to your application's requirements with flexible parameter pointers or adaptive programming.


Optimize energy efficiency with features that help you to save and manage energy. You can monitor the hourly, daily and cumulative energy consumption via kWh counters.

Analyze and resolve issues with the control panel's diagnostics menu. You can quickly analyze why the drive is performing as it is, whether running, stopped or running at the present speed.

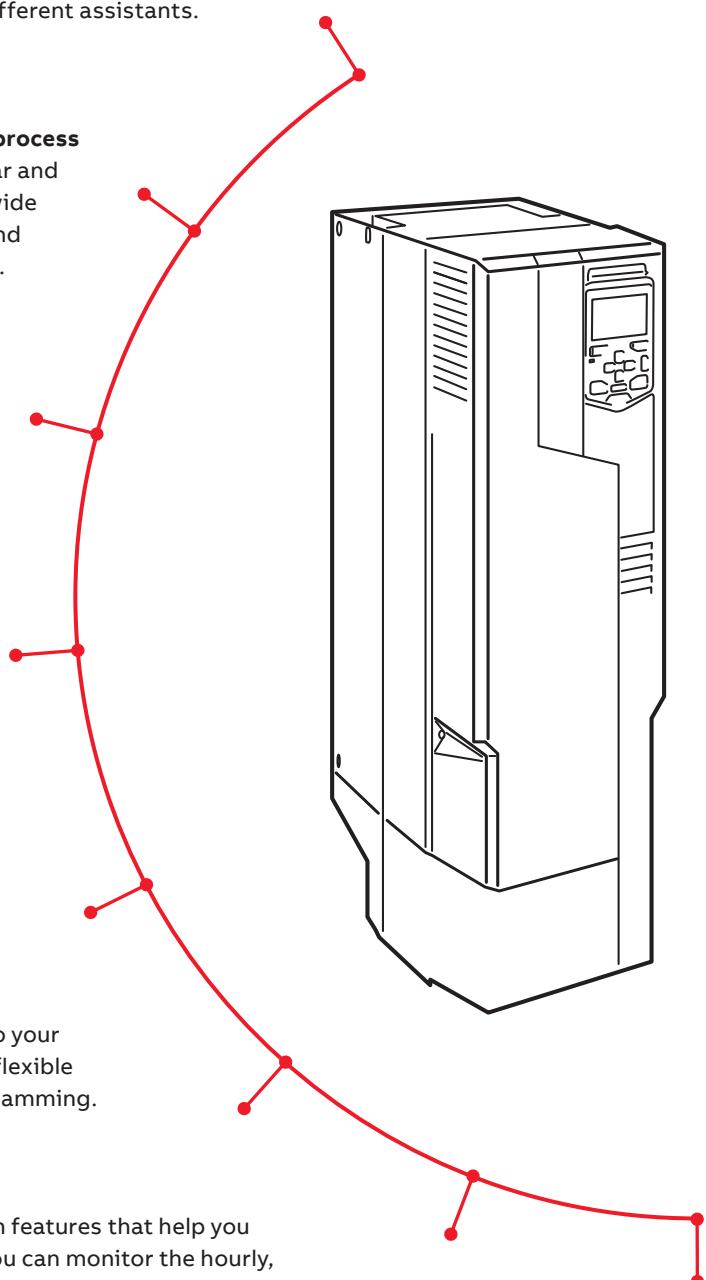

Standard interface and extensions for plug-in connectivity

ACS580 drives offer a wide range of standard interfaces. In addition, the drive has two option slots that can be used for extensions, including fieldbus adapters and input/output extension modules that allow an external +24 V supply with frame sizes R1 to R5. For frames R6-R11 external +24 V terminals are already integrated on the control board. For further information, please see the ACS580 user manual.

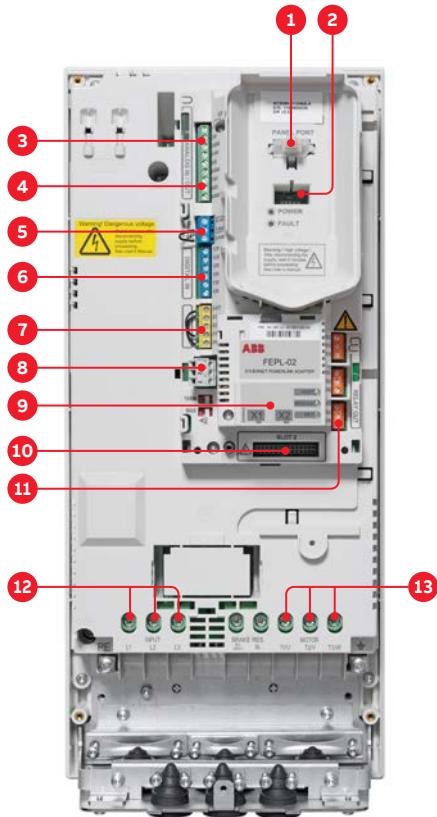

Default factory I/O connection diagram: Macro ABB standard

Terminal	Meaning	Default macro connections
X1 Reference voltage and analog inputs and outputs		
1	SCR	Signal cable shield (screen)
2	AI1	External frequency reference 1: 0 to 10 V
3	AGND	Analog input circuit common
4	+10 V	Output reference voltage 10 V DC
5	AI2	Not used
6	AGND	Analog input circuit common
7	AO1	Output frequency: 0 to 20 mA
8	AO2	Output current: 0 to 20 mA
9	AGND	Analog output circuit common
X2 & X3 Aux. voltage output and programmable digital inputs		
10	+24 V	Auxiliary voltage output +24 V DC
11	DGND	Auxiliary voltage output common
12	DCOM	Digital input common for all DI
13	DI1	Start/Stop: Activate to start
14	DI2	Fwd/Rev: Activate to reverse rotation direction
15	DI3	Constant speed selection
16	DI4	Constant speed selection
17	DI5	Ramp pair selection: Activate to select second pair
18	DI6	Not used
X6, X7, X8 Relay outputs		
19	RO1C	Ready
20	RO1A	250 V AC/30 V DC
21	RO1B	2 A
22	RO2C	Running
23	RO2A	250 V AC/30 V DC
24	RO2B	2 A
25	RO3C	Fault (-1)
26	RO3A	250 V AC/30 V DC
27	RO3B	2 A
X5 EIA-485 Modbus RTU		
29	B+	
30	A-	Built-in Modbus RTU fieldbus interface
31	DGND	
X4 Safe torque off		
34	OUT1	
35	OUT2	Safe torque off. Both circuits must be closed for the drive to start. The circuits are closed with jumper wires in the standard delivery.
36	SGND	
37	IN1	
38	IN2	
X10 *) 24 V AC/DC		
40	24 V	AC/DC-in. Ext. 24 V AC/DC input to power up the control unit when the main supply is disconnected
41	24 V	AC/DC+in.

*) The terminals 40-41 are integrated only in the frame sizes R6-R11. For the frame sizes R1-R5 I/O options (+L) are needed.

How to select a drive

The right drive is extremely easy to select. The following instructions show you how to order the right drive for your application.

Start by identifying your supply voltage.

Based on the supply voltage, follow either the right side or the middle section of the rating table. See pages 20, 21 and 22.

Select your drive's order code from the rating table based on your motor's nominal power rating.

Nominal ratings, ACS580-01 (3-phase supply voltage range 200-480 V)														
Frame type	Frame size	Nominal ratings	Light-duty use	3-phase, U ₂ = 400 V	Light-duty use	Heavy-duty use	Max. output current	Frame type	Frame size	Nominal ratings	Light-duty use	3-phase, U ₂ = 400 V	Light-duty use	
		P ₀ (kW)	I ₀ (A)	P ₀ (kW)	I ₀ (A)	P ₀ (kW)	I ₀ (A)			P ₀ (kW)	I ₀ (A)	P ₀ (kW)	I ₀ (A)	
ACS580-01-004A-4	R1	0.5	1.5	0.5	1.5	0.5	1.5	ACS580-01-004A-4	R1	0.5	1.5	0.5	1.5	
ACS580-01-004A-4	R1	1.1	3.3	1.1	3.3	1.1	3.3	ACS580-01-004A-4	R1	1.1	3.3	1.1	3.3	
ACS580-01-004A-4	R1	1.5	4.5	1.5	4.5	1.5	4.5	ACS580-01-004A-4	R1	1.5	4.5	1.5	4.5	
ACS580-01-004A-4	R1	2.2	5.4	2.2	5.4	2.2	5.4	ACS580-01-004A-4	R1	2.2	5.4	2.2	5.4	
ACS580-01-004A-4	R1	3	7.2	4.6	3	5.6	2.2	10.1	R1	3	7.2	4.6	3	5.6
ACS580-01-004A-4	R1	3.5	9.4	3.5	9.4	3.5	9.4	ACS580-01-004A-4	R1	3.5	9.4	3.5	9.4	
ACS580-01-004A-4	R1	5.5	12.5	12	5.5	9.4	6	14.1	R1	5.5	12.5	12	5.5	9.4
ACS580-01-004A-4	R2	7.5	17	14.2	17.5	12.6	5.5	22.7	R1	7.5	17	14.2	17.5	12.6
ACS580-01-004A-4	R2	10	22	18.5	22	15	5.5	27	R1	10	22	18.5	22	15
ACS580-01-004A-4	R2	15	32	30.4	35	24.6	11	44.3	R1	15	32	30.4	35	24.6
ACS580-01-004A-4	R2	18.5	38	36.1	41.5	31.6	15	55.9	R1	18.5	38	36.1	41.5	31.6
ACS580-01-004A-4	R2	22	46	44.6	50	36.1	15	65.9	R1	22	46	44.6	50	36.1
ACS580-01-004A-4	R2	30	62	58	68	44.6	22	76	R1	30	62	58	68	44.6
ACS580-01-004A-4	R2	38	75	64.6	75	58	22	86	R1	38	75	64.6	75	58
ACS580-01-004A-4	R2	45	88	82.7	95	72	37	102	R1	45	88	82.7	95	72
ACS580-01-004A-4	R2	52	106	100	110	85	45	118	R1	52	106	100	110	85
ACS580-01-004A-4	R2	60	125	110	125	95	55	134	R1	60	125	110	125	95
ACS580-01-004A-4	R2	75	169	165	175	145	75	247	R1	75	169	165	175	145
ACS580-01-004A-4	R2	90	199	185	200	175	90	287	R1	90	199	185	200	175
ACS580-01-004A-4	R2	110	256	160	160	150	90	327	R1	110	256	160	160	150
ACS580-01-004A-4	R2	150	393	278	280	264*	132	438	R1	150	393	278	280	264*
ACS580-01-004A-4	R2	160	400	343	344	290	200	440	R1	160	400	343	344	290
ACS580-01-004A-4	R2	200	543	444	200	393	160	498	R1	200	543	444	200	393
ACS580-01-004A-4	R2	250	640	500	250	447	200	544	R1	250	640	500	250	447
ACS580-01-004A-4	R2	300	752	644	200	547	200	545	R1	300	752	644	200	545
ACS580-01-004A-4	R2	380	900	750	200	647	200	546	R1	380	900	750	200	647
ACS580-01-004A-4	R2	450	1000	850	200	647	200	547	R1	450	1000	850	200	647
ACS580-01-004A-4	R2	500	1100	950	200	647	200	547	R1	500	1100	950	200	647
ACS580-01-004A-4	R2	600	1300	1100	200	647	200	547	R1	600	1300	1100	200	647
ACS580-01-004A-4	R2	700	1500	1300	200	647	200	547	R1	700	1500	1300	200	647
ACS580-01-004A-4	R2	800	1700	1500	200	647	200	547	R1	800	1700	1500	200	647
ACS580-01-004A-4	R2	900	1900	1600	200	647	200	547	R1	900	1900	1600	200	647
ACS580-01-004A-4	R2	1100	2560	1600	1600	150	90	287	R1	1100	2560	1600	1600	150
ACS580-01-004A-4	R2	1500	3930	2780	160	264*	132	438	R1	1500	3930	2780	160	264*
ACS580-01-004A-4	R2	1600	4000	343	200	393	200	440	R1	1600	4000	343	200	393
ACS580-01-004A-4	R2	2000	5430	444	200	393	160	498	R1	2000	5430	444	200	393
ACS580-01-004A-4	R2	2500	6400	500	200	447	200	544	R1	2500	6400	500	200	447
ACS580-01-004A-4	R2	3000	7520	644	200	547	200	545	R1	3000	7520	644	200	545
ACS580-01-004A-4	R2	3800	9000	750	200	647	200	546	R1	3800	9000	750	200	647
ACS580-01-004A-4	R2	4500	10000	850	200	647	200	547	R1	4500	10000	850	200	647
ACS580-01-004A-4	R2	5000	11000	950	200	647	200	547	R1	5000	11000	950	200	647
ACS580-01-004A-4	R2	6000	13000	1100	200	647	200	547	R1	6000	13000	1100	200	647
ACS580-01-004A-4	R2	7000	15000	1300	200	647	200	547	R1	7000	15000	1300	200	647
ACS580-01-004A-4	R2	8000	17000	1500	200	647	200	547	R1	8000	17000	1500	200	647
ACS580-01-004A-4	R2	9000	19000	1600	200	647	200	547	R1	9000	19000	1600	200	647
ACS580-01-004A-4	R2	11000	25600	1600	1600	150	90	287	R1	11000	25600	1600	1600	150
ACS580-01-004A-4	R2	15000	39300	2780	160	264*	132	438	R1	15000	39300	2780	160	264*
ACS580-01-004A-4	R2	16000	40000	343	200	393	200	440	R1	16000	40000	343	200	393
ACS580-01-004A-4	R2	20000	54300	444	200	393	160	498	R1	20000	54300	444	200	393
ACS580-01-004A-4	R2	25000	64000	500	200	447	200	544	R1	25000	64000	500	200	447
ACS580-01-004A-4	R2	30000	75200	644	200	547	200	545	R1	30000	75200	644	200	545
ACS580-01-004A-4	R2	38000	90000	750	200	647	200	546	R1	38000	90000	750	200	647
ACS580-01-004A-4	R2	45000	100000	850	200	647	200	547	R1	45000	100000	850	200	647
ACS580-01-004A-4	R2	50000	110000	950	200	647	200	547	R1	50000	110000	950	200	647
ACS580-01-004A-4	R2	60000	130000	1100	200	647	200	547	R1	60000	130000	1100	200	647
ACS580-01-004A-4	R2	70000	150000	1300	200	647	200	547	R1	70000	150000	1300	200	647
ACS580-01-004A-4	R2	80000	170000	1500	200	647	200	547	R1	80000	170000	1500	200	647
ACS580-01-004A-4	R2	90000	190000	1600	200	647	200	547	R1	90000	190000	1600	200	647
ACS580-01-004A-4	R2	110000	256000	1600	1600	150	90	287	R1	110000	256000	1600	1600	150
ACS580-01-004A-4	R2	150000	393000	2780	160	264*	132	438	R1	150000	393000	2780	160	264*
ACS580-01-004A-4	R2	160000	400000	343	200	393	200	440	R1	160000	400000	343	200	393
ACS580-01-004A-4	R2	200000	543000	444	200	393	160	498	R1	200000	543000	444	200	393
ACS580-01-004A-4	R2	250000	640000	500	200	447	200	544	R1	250000	640000	500	200	447
ACS580-01-004A-4	R2	300000	752000	644	200	547	200	545	R1	300000	752000	644	200	545
ACS580-01-004A-4	R2	380000	900000	750	200	647	200	546	R1	380000	900000	750	200	647
ACS580-01-004A-4	R2	450000	1000000	850	200	647	200	547	R1	450000	1000000	850	200	647
ACS580-01-004A-4	R2	500000	1100000	950	200	647	200	547	R1	500000	1100000	950	200	647
ACS580-01-004A-4	R2	600000	1300000	1100	200	647	200	547	R1	600000	1300000	1100	200	647
ACS580-01-004A-4	R2	700000	1500000	1300	200	647	200	547	R1	700000	1500000	1300	200	647
ACS580-01-004A-4	R2	800000	1700000	1500	200	647	200	547	R1	800000	1700000	1500	200	647
ACS580-01-004A-4	R2	900000	1900000	1600	200	647	200	547	R1	900000	1900000	1600	200	647
ACS580-01-004A-4	R2	1100000	2560000	1600	1600	150	90	287	R1	1100000	2560000	1600	1600	

Technical data

Mains connection	
Input voltage and output power range	3-phase, U_N 200 to 240 V, +10%/-15% ACS580-01: from 0.75 up to 75 kW 3-phase, U_N 380 to 480 V, +10%/-15% ACS580-01: from 0.75 up to 250 kW ACS580-04: from 250 up to 500 kW ACS580-07: from 75 up to 500 kW Auto-identification of supply voltage
Frequency	from 47 to 63 Hz
Power factor	$\cos\phi = 0.98$
Efficiency (at nominal power)	98%
Motor connection	
Voltage	3-phase, from 0 to supply voltage
Frequency	0 to 500 Hz
Motor control	Scalar and vector control
Torque control	Torque step rise time: <10 ms with nominal torque Non-linearity: ± 5% with nominal torque
Speed control	Static accuracy: 20% of motor nominal slip Dynamic accuracy: 1% seconds with 100% torque step
Maximum recommended motor cable length	R1: 100 m R2: 200 m R3-R11: 300 m
Product compliance	
CE	Low Voltage Directive 2014/34/EU, EN 61800-5-1: 2007 Machinery Directive 2006/42/EC, EN 61800-5-2: 2007 EMC Directive 2014/30/EU, EN 61800-3: 2004 + A1: 2012 RoHS directive 2011/65/EU Quality assurance system ISO 9001 and Environmental system ISO 14001 Waste electrical and electronic equipment directive (WEEE) 2002/96/EC RoHS directive 2011/65/EU UL, EAC, RCM, UL, cUL TÜV Nord (safety functions)
Harmonics compliance	
Built-in optimized DC choke as standard in AC580-01 meets the requirements of IEC 61000-3-12:2011.	
EMC according to EN 61800-3:2004 + A1:2012	
Frames R1 to R9 with built-in C2 category filter as standard Frames R10 and R11 with preconfigured built-in C3 category filter option	
Inputs and outputs (standard configuration)	
2 analog inputs	Selection of Current/Voltage input mode is user programmable.
Voltage signal	0 (2) to 10 V, R in >200 kΩ
Current signal	0 (4) to 20 mA, R in = 100 Ω
Potentiometer reference value	10 V ±1% max. 20 mA
2 analog outputs	AO1 is user programmable for current or voltage. AO2 current
Voltage signal	0 to 10 V, R load: >100 kΩ
Current signal	0 to 20 mA, R load: <500 Ω
Internal auxiliary voltage	24 V DC ±10%, max. 250 mA
6 digital inputs	12 to 24 V DC, 24 V AC, Connectivity of PTC sensors supported by a single digital input. PNP or NPN connection (5 DIs with NPN connection).
3 relay outputs	Maximum switching voltage 250 V AC/30 V DC Maximum continuous current 2 A rms
Supported thermistors	Any of the analog inputs, or digital input 6, are configurable for PTC with up to 6 sensors. Both analog outputs can be used to feed the PT100, PT1000, KTY83, KTY84 or Ni1000 sensors. For more detailed information please see the ACS580 hardware manual.

Environmental limits	
Ambient temperature	
Transport	-40 to +70 °C
Storage	-40 to +70 °C
Operation area	ACS580-01: -15 to +50 °C. No frost allowed R1 to R9 from +40 to +50 °C with derating ACS580-04: -15 to +55 °C. No frost allowed R10 to R11 from +40 to +55 °C with derating ACS580-07: 0 to +40 °C. No frost allowed R6 to R11 from +40 to +50 °C with derating
Cooling method	
Air-cooled	Dry clean air
Altitude	0 to 1,000 m Without derating 1,000 to 4,000 m With derating of 1%/100 m For more detailed information please see the ACS580 hardware manual
Relative humidity	5 to 95%, no condensation allowed
Degree of protection	ACS580-01: IP21 as standard. IP55 as option (frames R1 to R9) ACS580-04: IP00 as standard. IP20 as option (frames R10 to R11) ACS580-07: Cabinet-built frames R6 to R11: IP21 as standard. IP42 and IP54 as options
Functional safety	Safe torque off (STO according EN 61800-5-2) IEC 61508 ed2: SIL 3. IEC 61511: SIL 3. IEC 62061: SIL CL 3. EN ISO 13849-1: PL e
Contamination levels	No conductive dust allowed
Storage	IEC 60721-3-1. Class 1C2 (chemical gases). Class 1S2 (solid particles)*
Operation	IEC 60721-3-3. Class 3C2 (chemical gases). Class 3S2 (solid particles)*
Transportation	IEC 60721-3-2. Class 2C2 (chemical gases) Class 2S2 (solid particles)*

External power supply

Standard:
ACS580-01 frames R6-R9,
ACS580-04 all frames and
ACS580-07 all frames 1.5 A at 24 V AC/DC ±10%

With option:

ACS580-01 frames R1-R5 1.04 A at 24 V AC/DC ±10%

Communication

Protocol as standard (EIA-485): Modbus RTU. Protocols available as option: EtherNet/IP, EtherNet POWERLINK, Modbus/TCP, EtherCAT, PROFINET IO, PROFISafe (for STO and SS1-t functions), CANopen, ControlNet, DeviceNet and Profibus DP.

Protection functions

Overvoltage controller
Undervoltage controller
Motor and motor cable earth-leakage monitoring
Motor and motor cable short-circuit protection
Motor overtemperature protection
Output and input switch supervision
Motor overload protection
Phase-loss detection (both motor and supply)
Under load supervision (belt loss detection)
Overload supervision
Stall protection
Loss of control reference

*¹ C = Chemically active substances
S = Mechanically active substances



Dimensions

ACS580-01 IP21, standard

Frames	Height 1		Height 2		Width		Depth		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R1	373	14.7	331	13.0	125	4.9	223	8.8	4.6	10.1
R2	473	18.6	432	17.0	125	4.9	229	9.0	6.6	14.6
R3	490	19.3	490	19.3	203	8.0	229	9.0	11.8	26.0
R4	636	25.0	636	25.0	203	8.0	257	10.2	19	41.9
R5	732	28.8	596 ^{*)}	23.5	203	8.0	295	11.6	28.3	62.4
R6	727	28.6	548 ^{*)}	21.6	252	9.9	369	14.5	42.4	93.5
R7	880	34.6	600 ^{*)}	23.7	284	11.2	370	14.6	54	119.1
R8	965	38.0	680 ^{*)}	26.7	300	11.8	393	15.5	69	152.2
R9	955	37.6	680 ^{*)}	26.8	380	15.0	418	16.5	97	213.9



Height 1: Total height of the drive with glandbox

Height 2: Total height of the drive without glandbox

*) Height with the option +P944

ACS580-01 IP55, +B056

Frames	Height 1		Height 2		Width		Depth		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R1	403	15.9	403	15.9	128	5.0	233	9.2	4.8/5.4	10.6/11.2
R2	503	19.8	503	19.8	128	5.0	239	9.4	6.8/7.4	15.0/16.3
R3	490	19.3	733	28.9	206	8.1	237	9.3	13/15	28.7/33.1
R4	636	23.6	879	34.6	203	8.0	265	10.2	20/23.3	44.1/51.4
R5	732	28.8	1023	40.3	203	8.0	320	12.6	29/33	64.0/72.8
R6	727	28.6	—	—	252	9.9	380	15.0	43	94.8
R7	880	34.6	—	—	284	11.2	381	15.0	56	123.5
R8	965	38.0	—	—	300	11.8	452	17.8	77	169.8
R9	955	37.6	—	—	380	15.0	477	18.78	103	227.1




Height 1: Total height of the drive

Height 3: Total height of the drive with options +F287, +F316, +E223

Note: Options +F287, +F316, +E223 are available only for the IP55 frames R1-R5

ACS580-01 flange mounting dimensions, with +C135 or a loose option kit for IP21

Frames	Height		Width		Offs. Out		Offs. In		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R1	461	18.2	206	8.1	133	5.2	109	4.3	4.6	10.1
R2	551	21.7	206	8.1	130	5.1	114	4.5	6.5	14.6
R3	613	24.1	290	11.4	118	4.6	116	4.6	11.8	26.0
R4	776	30.6	290	11.4	120	4.7	137	5.4	19	41.9
R5	776	30.6	290	11.4	124	4.9	173	6.8	28.3	62.4
R6	672	26.5	374	14.7	193	7.6	167	6.6	42.4	93.5
R7	722	28.4	406	16.0	194	7.6	169	6.7	54	119.1
R8	814	32.1	433	17.0	202	8.0	184	7.2	69	152.2
R9	804	31.7	502	19.8	204	8.0	209	8.2	97	213.9



ACS580-04 IP00, standard

Frames	Height		Width		Depth		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R10	1462	57.6	350	13.8	529	20.8	162	357.2
R11	1662	63.4	350	13.8	529	20.8	200	440.9

**ACS580-04 IP20, +B051**


Frames	Height		Width		Depth		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R10	1462	57.6	350	13.8	529	20.8	162	357.2
R11	1662	63.4	350	13.8	529	20.8	200	440.9

**ACS580-07 IP21, standard**

Frames	Height		Width		Depth		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R6	2145	84.4	430	16.9	673	26.5	210	463
R7	2145	84.4	430	16.9	673	26.5	220	485
R8	2145	84.4	530	20.9	673	26.5	255	562
R9	2145	84.4	530	20.9	673	26.5	275	606
R10	2145	84.4	830	32.7	698	27.5	535	1179
R11	2145	84.4	830	32.7	698	27.5	581	1280

**ACS580-07 IP42, +B054**

Frames	Height		Width		Depth		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R6	2145	84.4	430	16.9	673	26.5	210	463
R7	2145	84.4	430	16.9	673	26.5	220	485
R8	2145	84.4	530	20.9	673	26.5	255	562
R9	2145	84.4	530	20.9	673	26.5	275	606
R10	2145	84.4	830	32.7	698	27.5	535	1179
R11	2145	84.4	830	32.7	698	27.5	581	1280

**ACS580-07 IP54, +B055**

Frames	Height		Width		Depth		Weight	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(kg)	(lb)
R6	2145	84.4	430	16.9	673	26.5	210	463
R7	2145	84.4	430	16.9	673	26.5	220	485
R8	2145	84.4	530	20.9	673	26.5	255	562
R9	2145	84.4	530	20.9	673	26.5	275	606
R10	2315	91.14	830	32.7	698	27.5	535	1179
R11	2315	91.14	830	32.7	698	27.5	581	1280



Ratings, types and voltages

Wall-mounted drives, ACS580-01 (3-phase supply voltage range 380-480 V)													
Frame type	Frame size	3-phase, $U_N = 400$ V							3-phase, $U_N = 480$ V				
		Nominal ratings		Light-duty use		Heavy-duty use		Max. output current	Light-duty use		Heavy-duty use		Max. output current
		P_N (kW)	I_N (A)	I_{Ld} (A)	P_{Ld} (kW)	I_{Hd} (A)	P_{Hd} (kW)		I_{Ld} (A)	P_{Ld} (hp)	I_{Hd} (A)	P_{Hd} (hp)	
ACS580-01-02A7-4	R1	0.75	2.6	2.5	0.75	1.8	0.55	3.2	2.1	1	1.6	0.75	2.9
ACS580-01-03A4-4	R1	1.1	3.3	3.1	1.1	2.6	0.75	4.7	3	1.5	2.1	1	3.8
ACS580-01-04A1-4	R1	1.5	4	3.8	1.5	3.3	1.1	5.9	3.5	2	3	1.5	5.4
ACS580-01-05A7-4	R1	2.2	5.6	5.3	2.2	4	1.5	7.2	4.8	3	3.4	2	6.1
ACS580-01-07A3-4	R1	3	7.2	6.8	3	5.6	2.2	10.1	6	3	4	3	7.2
ACS580-01-09A5-4	R1	4	9.4	8.9	4	7.2	3	13	7.6	5	4.8	3	8.6
ACS580-01-12A7-4	R1	5.5	12.6	12	5.5	9.4	4	14.1	12	7.5	7.6	5	11.4
ACS580-01-018A-4	R2	7.5	17	16.2	7.5	12.6	5.5	22.7	14	10	11	7.5	19.8
ACS580-01-026A-4	R2	11	25	23.8	11	17	7.5	30.6	23	15	14	10	25.2
ACS580-01-033A-4	R3	15	32	30.4	15	24.6	11	44.3	27	20	21	15	37.8
ACS580-01-039A-4	R3	18.5	38	36.1	18.5	31.6	15	56.9	34	25	27	20	48.6
ACS580-01-046A-4	R3	22	45	42.8	22	37.7	18.5	67.9	44	30	34	25	61.2
ACS580-01-062A-4	R4	30	62	58	30	44.6	22	76	52	40	40	30	76
ACS580-01-073A-4	R4	37	73	68.4	37	61	30	104	65	50	52	40	104
ACS580-01-088A-4	R5	45	88	82.7	45	72	37	122	77	60	65	50	122
ACS580-01-106A-4	R5	55	106	100	55	87	45	148	96	75	77	60	148
ACS580-01-145A-4	R6	75	145	138	75	105	55	178	124	100	96	75	178
ACS580-01-169A-4	R7	90	169	161	90	145	75	247	156	125	124	100	247
ACS580-01-206A-4	R7	110	206	196	110	169	90	287	180	150	156	125	287
ACS580-01-246A-4	R8	132	246	234	132	206	110	350	240	200	180	150	350
ACS580-01-293A-4	R8	160	293	278	160	246*)	132	418	260	200	240	150	418
ACS580-01-363A-4	R9	200	363	345	200	293	160	498	361	300	302	250	542
ACS580-01-430A-4	R9	250	430	400	200	363**)	200	545	414	350	361	300	542

Nominal ratings, ACS580-01

I_N Rated current available continuously without overloadability at 40 °C.

P_N Typical motor power in no-overload use.

Maximum output current

I_{max} Maximum output current. Available for 2 seconds at start.

Light-overload use

I_{Ld} Continuous current allowing 110% I_{Ld} for 1 minute every 10 minutes at 40 °C.

P_{Ld} Typical motor power in light-duty use.

Heavy-duty use

I_{Hd} Continuous current allowing 150% I_{Hd} for 1 minute every 10 minutes at 40 °C.

*) Continuous current allowing 130% I_{Hd} for 1 minute every 10 minutes at 40 °C.

**) Continuous current allowing 125% I_{Hd} for 1 minute every 10 minutes at 40 °C.

P_{Hd} Typical motor power in heavy-duty use.

The ratings apply for the frames R1 to R9 up to +40 °C in enclosure class 21.

The ratings apply for the frames R10 to R11 up to +40 °C in enclosure class IP00/IP20.

For derating at higher altitudes, temperatures, switching frequencies or enclosure classes, see the HW manuals, document codes: 3AXD5000018826 and 3AXD5000015497.

Drive modules, ACS580-04 (3-phase supply voltage range 380-480 V)

Frame type	Frame size	3-phase, $U_N = 400$ V							3-phase, $U_N = 480$ V				
		Nominal ratings		Light-duty use		Heavy-duty use		Max. output current	Light-duty use		Heavy-duty use		Max. output current
		P_N (kW)	I_N (A)	I_{Ld} (A)	P_{Ld} (kW)	I_{Hd} (A)	P_{Hd} (kW)		I_{Ld} (A)	P_{Ld} (hp)	I_{Hd} (A)	P_{Hd} (hp)	
ACS580-04-505A-4	R10	250	505	485	250	361	200	560	483	400	361	300	560
ACS580-04-585A-4	R10	315	585	575	315	429	250	730	573	450	414	350	730
ACS580-04-650A-4	R10	355	650	634	355	477	250	730	623	500	477	400	730
ACS580-04-725A-4	R11	400	725	715	400	566	315	1020	705	600	566	450	850
ACS580-04-820A-4	R11	450	820	810	450	625	355	1020	807	700	625	500	1020
ACS580-04-880A-4	R11	500	880	865	500	725 ^{*)}	400	1100	807	700	625	500	1020

Cabinet-built drives, ACS580-07 (3-phase supply voltage range 380-480 V)

Frame type	Frame size	3-phase, $U_N = 400$ V							3-phase, $U_N = 480$ V				
		Nominal ratings		Light-duty use		Heavy-duty use		Max. output current	Light-duty use		Heavy-duty use		Max. output current
		P_N (kW)	I_N (A)	I_{Ld} (A)	P_{Ld} (kW)	I_{Hd} (A)	P_{Hd} (kW)		I_{Ld} (A)	P_{Ld} (hp)	I_{Hd} (A)	P_{Hd} (hp)	
ACS580-07-0145A-4	R6	75	145	138	75	105	55	178	124	100	96	75	178
ACS580-07-0169A-4	R7	90	169	161	90	145	75	247	156	125	124	100	247
ACS580-07-0206A-4	R7	110	206	196	110	169	90	287	180	150	156	125	287
ACS580-07-0246A-4	R8	132	246	234	132	206	110	350	240	200	180	150	350
ACS580-07-0293A-4	R8	160	293	278	160	246 ^{**}	132	418	260	200	240	150	418
ACS580-07-0363A-4	R9	200	363	345	200	293	160	498	361	300	302	250	542
ACS580-07-0430A-4	R9	250	430	400	200	363 ^{***}	200	617	414	350	361	300	542
ACS580-07-0505A-4	R10	250	505	485	250	361	200	560	483	400	361	300	560
ACS580-07-0585A-4	R10	315	585	575	315	429	250	730	573	450	414	350	730
ACS580-07-0650A-4	R10	355	650	634	355	477	250	730	623	500	477	400	730
ACS580-07-0725A-4	R11	400	725	715	400	566	315	1020	705	600	566	450	850
ACS580-07-0820A-4	R11	450	820	810	450	625	355	1020	807	700	625	500	1020
ACS580-07-0880A-4	R11	500	880	865	500	725 ^{*)}	400	1100	807	700	625	500	1020

Nominal ratings, ACS580-04 and ACS580-07

I_N Rated current available continuously without overloadability at 40 °C.

P_N Typical motor power in no-overload use.

Maximum output current

I_{max} Maximum output current. Available for 2 seconds at start.

Light-overload use

I_{Ld} Continuous current allowing 110% I_{N} for 1 minute every 10 minutes at 40 °C.

P_{Ld} Typical motor power in light-duty use.

Heavy-duty use

I_{Hd} Continuous current allowing 150% I_{N} for 1 minute every 10 minutes at 40 °C.

^{*)} Continuous current allowing 140% I_{N} for 1 minute every 10 minutes at 40 °C.

^{**} Continuous current allowing 130% I_{N} for 1 minute every 10 minutes at 40 °C.

^{***} Continuous current allowing 125% I_{N} for 1 minute every 10 minutes at 40 °C.

P_{Hd} Typical motor power in heavy-duty use.

The ratings apply for the frames R6 to R9 up to +40 °C in enclosed IP class 21.

The ratings apply for the frames R10 to R11 up to +40 °C in enclosed IP00/IP20.

For derating at higher altitudes, temperatures or switching frequencies, see the HW manuals, document codes: 3AXD50000018826, 3AXD50000015497, 3AXD50000045815 and 3AXD50000032622.

Ratings, types and voltages

3-phase, $U_N = 230 \text{ V}$ (range 200 to 240 V). The power ratings are valid at nominal voltage 230 V (0.75 to 75 kW)

Drive type	Frame size	Nominal ratings		Light-duty use		Heavy-duty use		Maximum output current I_{\max} (A)
		I_N (A)	(kW)	I_{ld} (A)	P_{ld} (kW)	I_{hd} (A)	P_{hd} (kW)	
ACS580-01-04A7-2	R1	4.7	0.75	4.6	0.75	3.5	0.55	6.3
ACS580-01-06A7-2	R1	6.7	1.1	6.6	1.1	4.6	0.75	8.9
ACS580-01-07A6-2	R1	7.6	1.5	7.5	1.5	6.6	1.1	11.9
ACS580-01-012A-2	R1	12	3	11.8	3	7.5	2.2	19.1
ACS580-01-018A-2	R1	16.9	4	16.7	4	10.6	3.0	22
ACS580-01-025A-2	R2	24.5	5.5	24.2	5.5	16.7	4.0	32.7
ACS580-01-032A-2	R2	31.2	7.5	30.8	7.5	24.2	5.5	43.6
ACS580-01-047A-2	R3	46.7	11	46.2	11	30.8	7.5	62.4
ACS580-01-060A-2	R3	60	15	59.4	15	46.2	11	83.2
ACS580-01-089A-2	R5	89	22	88	22	74.8	18.5	135
ACS580-01-115A-2	R5	115	30	114	30	88.0	22.0	158
ACS580-01-144A-2	R6	144	37	143	37	114	30	205
ACS580-01-171A-2	R7	171	45	169	45	143	37	257
ACS580-01-213A-2	R7	213	55	211	55	169	45	304
ACS580-01-276A-2	R8	276	75	273	75	211	55	380

Nominal ratings

I_N Rated current available continuously without overloadability at 40 °C.

P_N Typical motor power in no-overload use.

Maximum output current

I_{\max} Maximum output current. Available for 2 seconds at start, then as long as allowed by drive temperature.

Light-overload use


I_{ld} Continuous current allowing 110% I_{ld} for 1 minute every 10 minutes at 40 °C.

P_{ld} Typical motor power in light-overload use.

The ratings apply for the frames R1 to R9 up to +40 °C in enclosed IP21/IP55.

For derating at high altitudes, temperatures or switching frequencies, see the user's HW manual, document code: 3AXD50000035866.

Overloadability and output current illustration

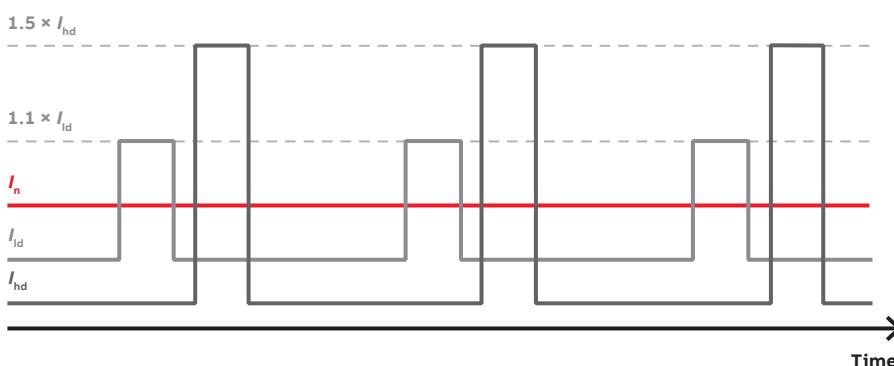

Definition	ACS580
No overload	I_N
110% overload 1 min / 10 minutes	I_{ld}
150% overload 1 min / 10 minutes	I_{hd}



Easiness on a whole new level



The assistant control panel's intuitive user interface, assistants and ready-made macros offer simplicity for everyday life. The panel guides you through commissioning without a need to know any drive parameters and helps in unclear situations.




Assistant control panel, ACS-AP-S

Set up the drive, fine-tune motor control and monitor values that matter using the assistant control panel, delivered as standard with all ACS580 drives. The assistant control panel can also be used with the ACS480 and the ACS380.

Commission




without a hassle

Select language, set time and date, name the drive, enter motor values, test rotating the motor.






Primary settings

Select ready-made macros, perform ID-run, fine-tune settings related to e.g. ramps, limits, PIDs, fieldbuses, reset to defaults.






Input/output menu

Set and monitor your input/output (I/O) connections for real-time diagnostics






Home view displays

Monitor the values that are the most important to you. You can select values for monitoring from a ready-made list or choose user-defined parameters.



Help button

The help button provides more information about your selection and it can be pressed in any view.



Control panel options and mounting kits

The standard delivery of the ACS580 includes the assistant control panel (requires the +J400 code), but it can be also replaced by other control panels.



Bluetooth control panel, ACS-AP-W^{*)}

The optional Bluetooth panel enables connection with the Drivetune mobile app. The app is available for free from Google Play and the Apple App store. Together with the Drivetune app and the Bluetooth panel, users can, for example, commission and monitor the drive remotely.



Industrial control panel, ACS-AP-I^{*)}

The industrial control panel is compatible with all ABB drives, making it simple to use a single panel with different products.



Basic control panel, ACS-BP-S

The icon-based control panel supports users with parameter backup, settings and fault tracking in basic operation.



Panel bus adapter, CDPI-01

The panel bus adapter is an ideal choice if there is a need to control multiple drives with a single control panel. The panel bus adapter offers also simplicity for cabinet installations as by using it the control panel can be installed on the cabinet door and the drive can be operated easily and safely.



Blank control panel, CDUM-01

The blank control panel can be used for covering the control panel slot if no control panel or panel bus adapter is needed.



Control panel mounting platform, DPMP-01

This mounting platform is for surface mountings. This also requires RDUM-01 (blank control panel with the RJ-45 connector) and a control panel (assistant, basic, Bluetooth or industrial).



Control panel mounting platform, DPMP-02

This mounting platform is for flush mountings. This also requires RDUM-01 (blank control panel with the RJ-45 connector) and a control panel (assistant, basic, Bluetooth or industrial).



Door mounting kit, DPMP-EXT

The door mounting kit is ideal for cabinet installations. A kit for one drive includes one DPMP-02 and one CDPI-01 (blank control panel cover with RJ-45 connector). If a different control panel than the assistant panel is desired for cabinet door installation, it must be ordered separately.



Control panel mounting kit for outdoor installation DPMP-04/05

Enables control panel outdoor mounting thanks to IP66 protection class, UV resistance and IK07 impact protection rating.


Door mounting and daisy chaining

Improve safety and leverage the full potential of the ACS580 control panel options with a door mounting kit and panel bus adapter.



Door mounting fosters easy operation and safety. It enables you to operate the drive without opening the cabinet door, saving time and keeping all the electronics behind the closed door. Up to 32 drives can be connected to one

control panel for even easier and quicker operation. When daisy chaining the drives, you need only one assistant control panel. The rest of the drives can be equipped with panel bus adapters.

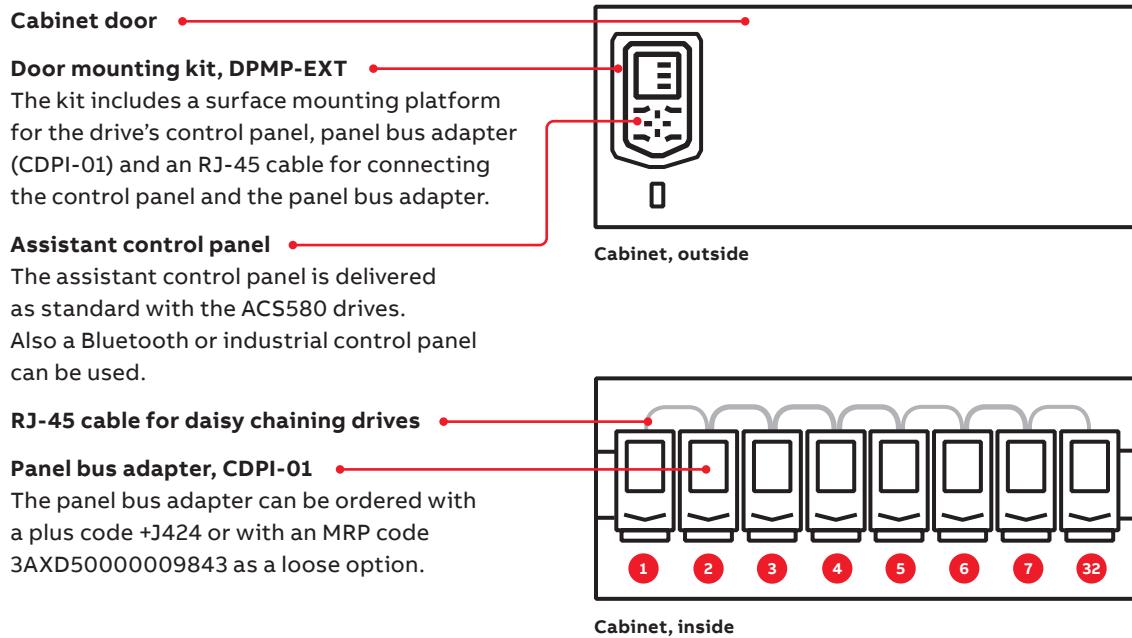

Control panel options

The ACS-AP-S assistant control panel (plus code +J400) is included as standard in the delivery.

If no code is mentioned in the ACS580 order, the assistant control panel is automatically added to the delivery. It can be replaced by one of the other +Jxxx options listed below.

MRP code	Plus code	Description	Type designation
3AU0000064884	+J400	Assistant control panel **)	ACS-AP-S
3AXD5000025965	+J429	Control panel with Bluetooth interface */**)	ACS-AP-W
3AU0000088311	+J425	Industrial assistant control panel */**)	ACS-AP-I
3AXD5000028828	+J404	Basic control panel**	ACS-BP-S
3AXD5000009843	+J424	Blank control panel cover (no control panel delivered)	CDUM-01
3AXD5000004419	-	Panel bus adapter	CDPI-01
3AU0000108878	-	Control panel mounting platform (flush mounted, requires also panel bus adapter on the drive)	DPMP-01
3AXD5000009374	-	Control panel mounting platform (surface mounted, requires also panel bus adapter on the drive)	DPMP-02
3AXD5000016230	-	Control panel mounting platform option, only for ACS580-04 modules	DPMP-03
3AXD50000217717		Control panel mounting kit for outdoor installation	DPMP-04
3AXD50000240319		Control panel mounting kit for outdoor installation, only for ACS580-04/34	DPMP-05
3AXD5000010763	-	Door mounting kit for the panel (for one drive, contains both DPMP-02 and CDPI-01)	DPMP-EXT

*) Compatible with ACS880 drives

**) Compatible with the ACS480 and ACS380



Higher enclosure class for cabinet-free installations even in harsh conditions

Don't let dust, moisture or dirt interrupt your processes and drag down productivity. ACS580 IP55/UL Type 12 units keep your systems running even in tough conditions.



- ⌚ Take advantage of flexible, cabinet-free installation
- ⚡ Save space, increase safety and reduce overall costs
- 📈 Maintain productivity in harsh conditions
- ⚙️ Minimized downtime and flawless operation

Compact units for rough environments

The ACS580 IP55 and UL Type 12 units are an ideal choice for harsh environments, where impurities, such as dust or dirt waft in the air. Typical harsh environments include textile, cement, metal and wood processing industries and harsh outdoor conditions in desert and tropical environments. Higher protection class ensures smooth processes by reducing downtime.

These units can be installed directly on the wall closer to the motor, which provides flexibility and simplifies installation. The robust, protective design ensures that no additional enclosures or components, such as dust filters and fans, are needed.

Be productive, save money and keep it simple

If there's a job assignment to build an outdoor swimming pool, the construction employees need to have the right tools and equipment to be successful and productive. A shovel and garden hose are obviously not the right choice for the job. The same applies to your processes: in order to perform the job well, you need to have the right equipment for it.

If the environment around your processes includes impurities, drives with lesser enclosure ratings are more likely to fail because they are not designed for harsh environments. A failure causes an interruption and instantly cuts down productivity and adds costs. Coated control boards of the ACS580 IP55/UL Type 12 units, increased use of plastics with smart design, and fully gasketed control panel section that maintains the IP rating even if the control panel is removed help keep your processes up and running in tough environments.

Ordering codes	Description
+B056	IP55/UL Type 12 unit (R1-R9)
+F278	Integrated main switch (R1-R5) *)
+E223	Integrated C1 filter (R1-R5) *)
+F316	Integrated main switch and C1 filter (R1-R5) *

*) Integrated into the R1 and R2, external box for the R3, R4 and R5.

Installing the drive closer to the motor allows shorter motor cables to be used. Shorter cables not only cost less and are easier to handle, but they make it easier to fulfill EMC requirements and reduce the need for additional filters.

Cost reductions take place also by eliminating the need for a cabinet. IP55/UL Type 12 enclosure provides protection from dust and jetting water from any direction. Speed-controlled main cooling fans maintain optimal drive operating temperatures without a need for external cooling. Keeping the drive at optimal temperature increases the lifetime of the drive.

In addition, the IP55/UL Type 12 units reduce maintenance costs compared to cabinet-mounted drives because of the elimination of air filters. The cabinet air filters need to be replaced on a regular basis and if they're not cleaned or taken care of properly, the cabinet temperature may rise and cause issues in the process. In these situations a maintenance engineer may need to open the cabinet door to identify the root cause.

Exploring the root cause is extra work and an open cabinet door instantly decreases safety, exposes all the components to the impurities and interrupts your processes. All these costs can be avoided with cabinet-free installation.

Integrated main switch and EMC C1 filter for further safety improvements and cost reductions

The ACS580 IP55/UL Type 12 units can be ordered with an integrated main switch and/or EMC C1 filter (R1-R5). The integrated main switch further simplifies the installation and improves safety as it ensures a correct drive is being disconnected instead of another one. The switch can be padlocked with three padlocks and in case all padlocks are used, three people need to agree and observe together whether it is safe to connect the drive before the drive can be connected.

Having the EMC C1 filter embedded to the drive, there is no need to order, install and test it separately. The integrated filter is already tested with the drive and it is prewired so there is no need for additional cabling.



ACS580-07 cabinet-built drives

Effortless process automation in a ready-made cabinet

The ACS580-07 is part of the all-compatible family and a cabinet-built extension to the ACS580 series. They are suited for many different applications, easy to use, order and maintain, and they are quickly available. The simple and robust design ensures reliable operation even in harsh environments. The cabinets are compact in size, including flange mounting (R6-R9) and optimized cooling system as standard.



For many purposes: The ACS580-07 is ready to control many applications including, mixers, extruders, compressors, centrifuges, and fans, also installed in potentially explosive environment.



Easy to order: An EMC filter, chokes, assistant control panel, Modbus RTU, STO and installation tools are included as standard, and in addition there are several options available to further fulfill your needs. (See page 57)



Fast to get: Cabinet-built ACS580-07 drives are delivered fast from the factory.



Easy to use: Application control is easy to setup through the assistant control panel. Also other all-compatible ACS580 user interfaces can be used with the ACS580-07. (See page 25)



Easy to maintain: Smartly positioned fans and filters ensure the longevity of the drive and its components. When it is time to do maintenance, the necessary components are in easily accessible locations.



EMC tested: All cabinet-built ACS580-07 drives are tested by 3rd party facilities and have certified results for emitted radiations in accordance to IEC 61800-3ED.2:2004+A1(2011). R6-R9 are classified as C2 and R10-R11 as C3.




Thermal tested: The thermal properties are tested in accordance to IEC 61800-5-1:2007 and UL61800-5-1 1st ed. 2012 standards to ensure the environment and operators stay safe in all operating conditions. Be it a premature fan failure or clogged environmental filters to restrict the cooling capabilities, the tests verify that the equipment is self-protecting it at all times.




Adaptable to harsh environments: High enclosure classes and unique cooling system ensure the units stay cool even in harsh environments with air pollution.



Frame sizes R6-R9

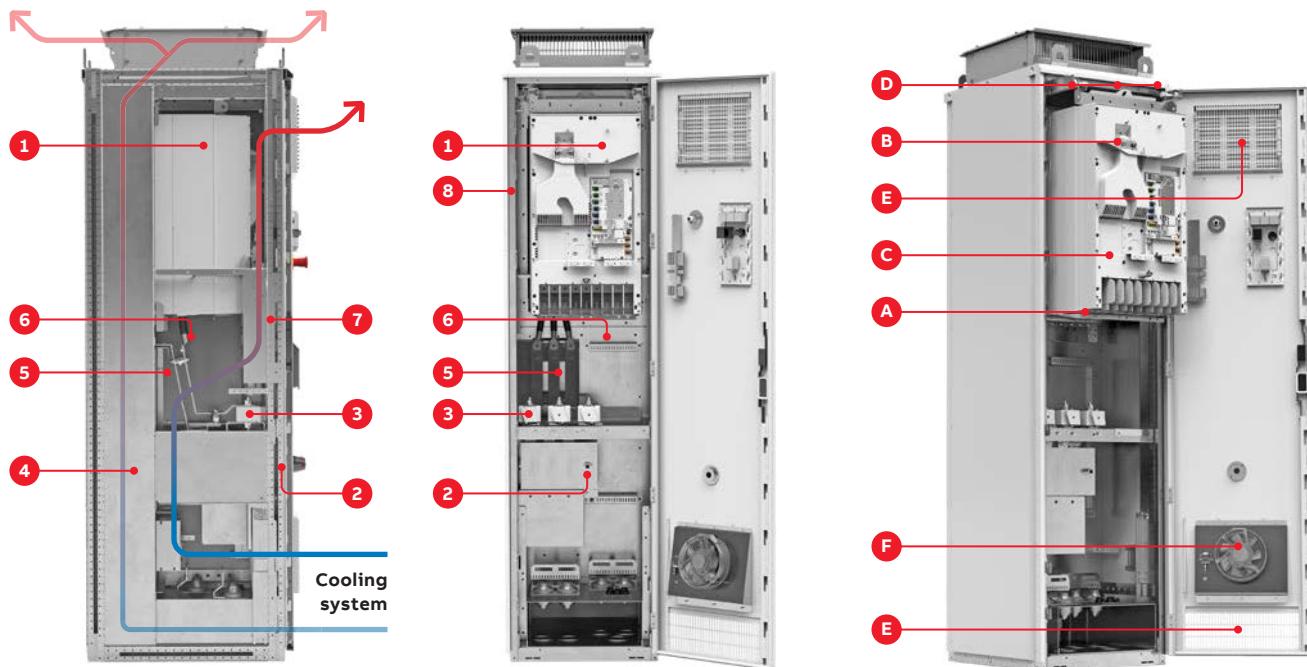

Frame sizes R10-R11

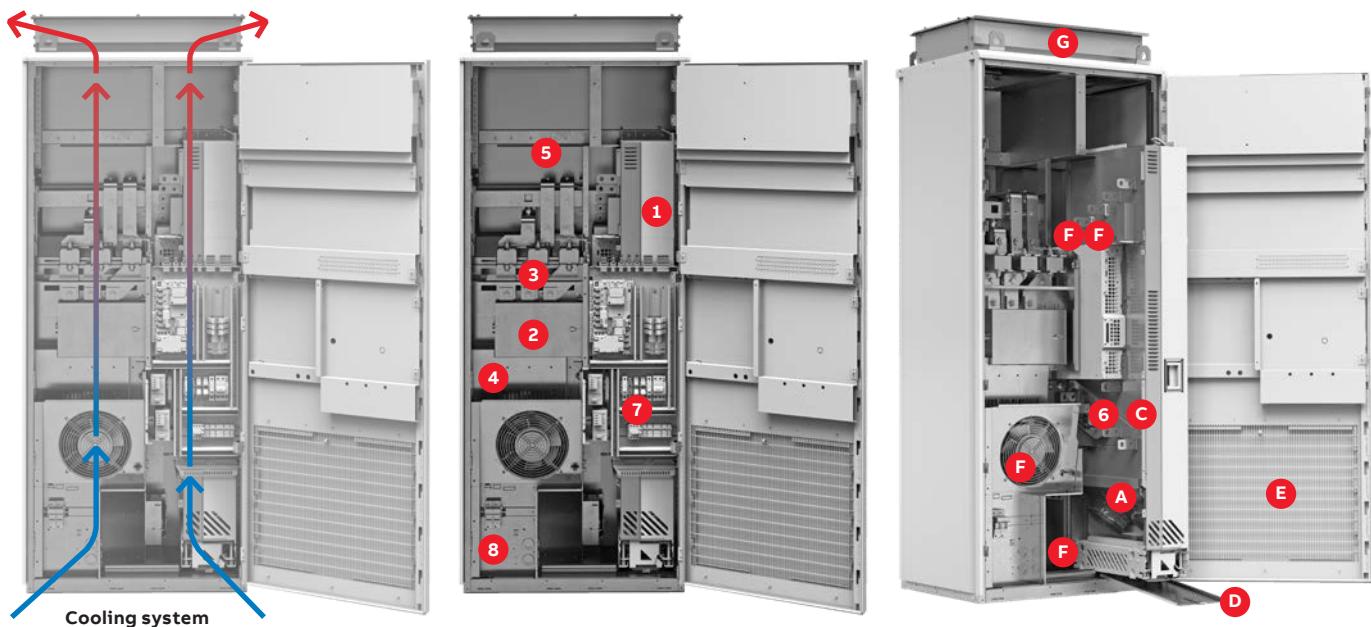

Cabinet components

1. Module
2. Main switch or MCC8, option +F289
3. Fuses
4. Space for optional du/dt filter or cabinet resistors
5. Space for a line contactor option +F250
6. Common mode filter allocation
7. Space for safety, ATEX or external power supply options
8. Space for options +M600...+M605

Maintenance operation components

- A Main fans
- B Auxiliary fans
- C Capacitors (inside the module)
- D Rails and ramp supporting maintenance operation
- E Filters for dust and external components
- F Other supporting fans for R10 and R11
- G Roof top for R10 and R11 (only IP54)

Commissioning, programming and customization tools

Your engineering efficiency is boosted with our commissioning and programming tools, giving you the optimal solution to perform virtualization, planning, commissioning and maintenance.

Safe configuration for unpowered drives

The CCA-01 cold configuration adapter provides a serial communication interface for unpowered ACS580 drives. With the adapter, safety isolation of both serial communication and control board power supply is possible. The power supply is taken from a PC USB port.

Cold configurator



Users can download the software and parameters to drives without powering the drive.

MRP code	Description	Type designation
3AXD5000019865	Cold configurator adapter, packed kit	CCA-01

Drive composer

The Drive composer PC tool offers fast and harmonized setup, commissioning and monitoring for all-compatible drives. The free version of the tool provides startup and maintenance capabilities and gathers all drive information, such as parameter loggers, faults, backups and lists, into a support diagnostics file. Drive composer pro provides additional features such as custom parameter windows, graphical control diagrams of the drive's configuration, and improved monitoring and diagnostics.

Drive composer	Entry level (free)	Pro level
	Basic functionality	Entry-level features
	Parameter setting	Networked drives
	Point-to-point connection	Control diagrams
	Simple monitoring	Data logger(s)
	Supports adaptive programming	Graphical safety setup
	Adaptive programming in Demo mode	Adaptive (block) programming
	–	Multiple backup and restore
	–	Drive configuration by using virtual drive

Link/MRP codes	Description	Type designation
new.abb.com/drives/software-tools/drive-composer	Link to download free Drive composer entry	–
9AKK105408A3415	Drive composer entry PC tool (document)	–
3AUUA0000108087	Drive composer pro PC tool (single user license)	DCPT-01
3AUUA0000145150	Drive composer pro PC tool (10 users license)	DCPT-01
3AUUA0000145151	Drive composer pro PC tool (20 users license)	DCPT-01

Automation Builder

ABB Automation Builder is the integrated software suite for machine builders and system integrators wanting to automate their machines and systems in a productive way. Combining the tools required for configuring, programming, debugging and maintaining automation projects in a common, intuitive interface, Automation Builder addresses the largest single cost element of most of today's industrial automation projects: software.

Adaptive programming

Adaptive programming software, embedded inside the drive, is especially handy when there is a need to distribute some of the machine's control logic to the drive. Adaptive programming brings energy savings when the drive is adjusted to control the application optimally. You can use our Drive composer PC tool to set up the adaptive programming. The drive also offers sequence programming capabilities. Adaptive programming makes it possible to enhance the existing application control program to precisely fit users' application needs. The program is also handy for ensuring that the drive's electrical design is connected as it should be with working drive signals.

Drive manager

Drive Manager for SIMATIC (DM4S-01) is a plug-in device tool that can be easily installed, for example, in the STEP 7 and TIA Portal. It utilizes the TCI interface of the SIMATIC PLC to communicate with drives connected to PROFIBUS or a PROFINET network.

Drive Manager for SIMATIC offers several useful, ready-made features that simplify the setup of ABB low voltage drives used in combination, for example, with SIMATIC S7 PLCs including:

- Network connection over PROFIBUS and PROFINET (single point of access)
- Online and offline configuration of drives
- Monitoring of actual drive values
- Export to/import from the drive-dedicated PC tools
- Saving drive parameter settings within the SIMATIC PLC project

Automation Builder

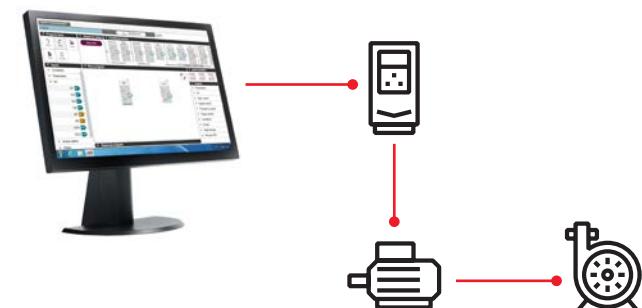


ABB Automation Builder covers the engineering of ABB PLCs, safety PLCs, control panels, drives, motion and robots.


The common engineering tool Automation Builder is used for drive and PLC programming and configuration.

Automation Builder is available in Basic, Standard and Premium editions, fitting the needs of small projects and managing the challenges of many and large projects for OEM and system integrators.

Adaptive programming



Drive manager

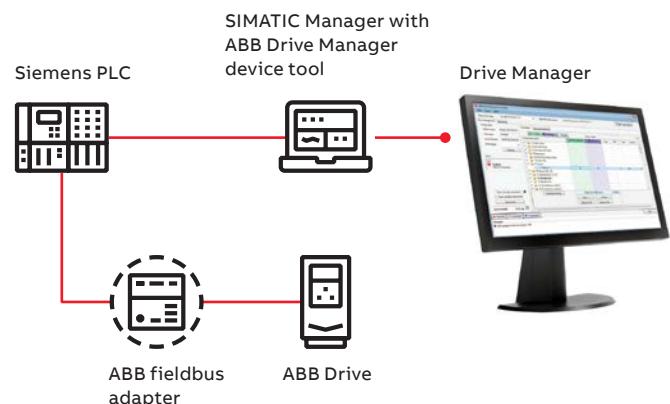


Communication and connectivity

Fast and reliable communication

The **F-series fieldbus adapter modules** are flexible, plug-in adapters that provide fast and simple universal connectivity to all major controllers. Universal connectivity means ABB low voltage drives connect to automation controllers and communication networks, allowing users to choose the best network to meet their needs.

- Reduces mechanical and electrical cost
- Decrease in downtime
- Increase in productivity
- Diminished start-up costs
- Lower maintenance and diagnostic costs
- Quick access to networked drives with PC-based start-up and maintenance software tools
- Reductions in wiring costs compared to traditional I/O connections

Industrial automation plant – different network possibilities and their secure deployment

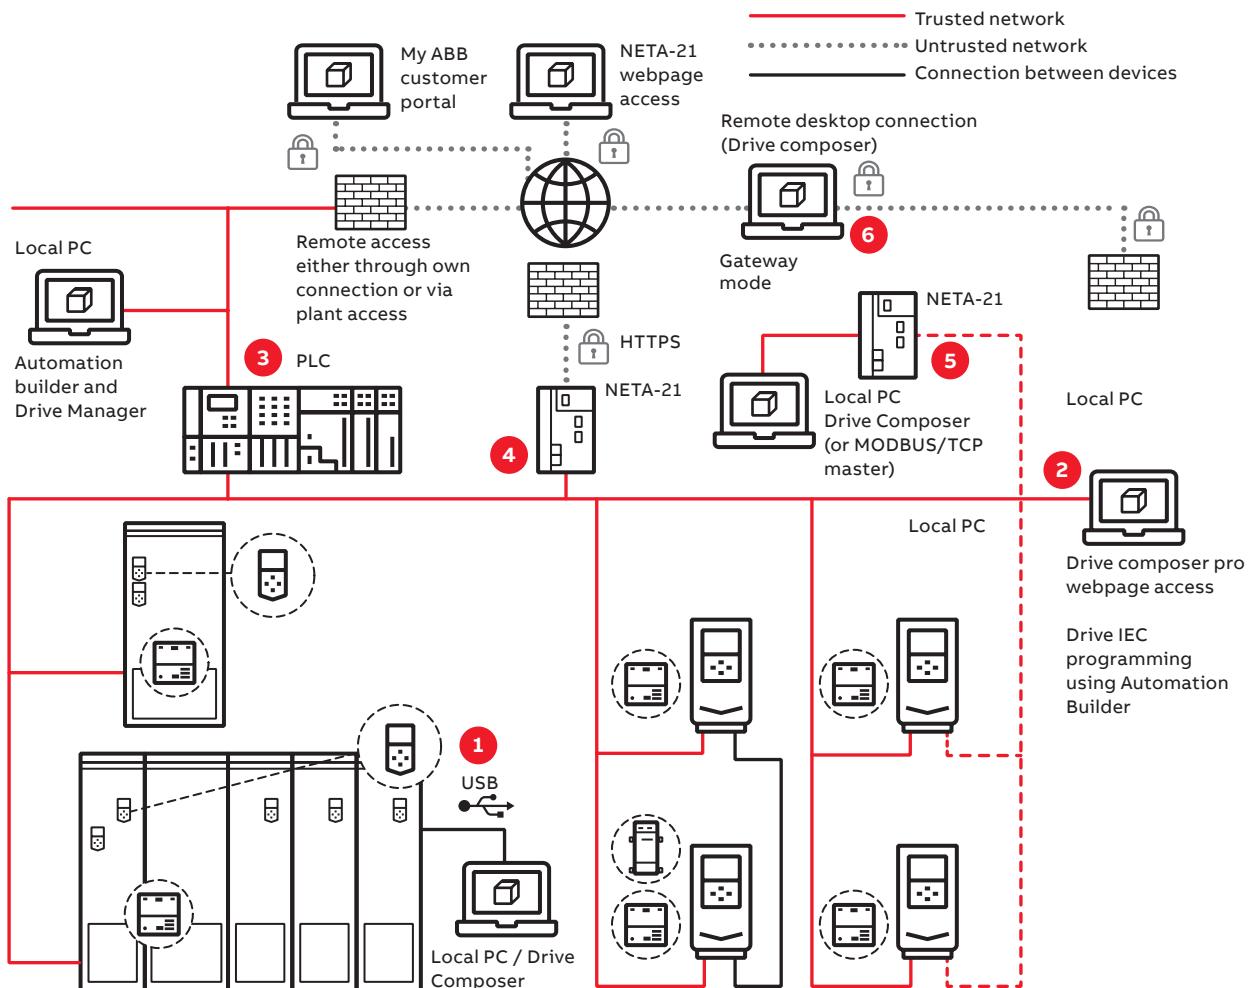


1. Local connections (point-to-point serial communication, e.g. USB) or
2. Shared (with control) upper-level physical fieldbus network (e.g., PROFINET) using Ethernet tool communication and/or
3. Communicating also through PLC system using Drive Manager device tool or
4. NETA-21 remote monitoring tool web interface or
5. NETA-21 acting as a gateway between or
6. Third-party remote desktop connection.

Communication and connectivity Options

Fieldbus adapter modules

The ACS580 comes with Modbus RTU fieldbus interface as standard, and it is also compatible with a wide range of additional fieldbus protocols. Fieldbus communication reduces wiring costs compared to traditional hardwired input/output connections. The fieldbus options can be installed into a slot one (1).

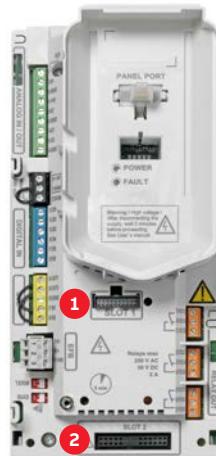

Fieldbus options

	Plus code	MRP code	Fieldbus protocol	Adapter
	+K451	68469341	DeviceNet™	FDNA-01
	+K454	68469325	PROFIBUS DP. DPV0/DPV1	FPBA-01
	+K457	68469376	CANopen®	FCAN-01
	+K458	3AU0000031336	Modbus RTU	FSCA-01
	+K462	3AU0000094512	ControlNet	FCNA-01
	+K469	3AU0000072069	EtherCAT®	FECA-01
	+K470	3AU0000072120	POWERLINK	FEPL-02
	+K490	3AXD50000192786	Two port Ethernet/IP	FEIP-21
	+K491	3AXD50000049964	Two port Modbus/TCP	FMBT-21
	+K492	3AXD50000192779	Two port PROFINET IO	FPNO-21
	+Q986	3AXD50000112821	Safety functions fieldbus Profisafe module	FSPS-21



Options

Plus code	MRP code	Description	Type designation
+L501	3AXD5000004420	External 24 V AC and DC 2 x RO and 1 x DO	CMOD-01
+L523	3AXD5000004418	External 24 V and isolated PTC interface	CMOD-02
+L512	3AXD5000004431	115/230 V digital input 6 x DI and 2 x RO	CHDI-01
+L537	3AXD5000033578	ATEX-certified PTC interface, Ex II (2) GD and external 24 V*)	CPTC-02
+L500	3AXD50000137954	Bipolar analog I/O adapter module**)	CBAI-01

*) For further information please see pages 44-45.

**) No additional analog input/output is offered

Safety options

Integrated safety

Integrated safety reduces the need for external safety components, simplifying configuration and reducing installation space. The safety functionality is a built-in feature of the ACS580, with safe torque off (STO) as standard. ACS580 can also be part of PROFIsafe over PROFINET network, where safety PLC is controlling the STO or safe stop 1, time controlled, SS1-t functionality. This connectivity and functionality can be done by using the FSPS-21 option module.

The drives' functional safety is designed in accordance with EN/IEC 61800-5-2 and complies with the requirements of the European Union Machinery Directive (2006/42/EC). The safety functions are certified by TÜV Nord and comply with the highest safety performance level (SIL 3/PL e) for machinery safety. It is possible to install the safety modules also afterwards to the drive.


PROFIsafe safety functions module FSPS-21

The FSPS-21 module has integrated PROFIsafe, safety functions and PROFINET IO connection. The ready-made safety functions make safety configuration in the drive unnecessary. The module supports STO and SS1-t safety functions. It is used together with a safety PLC that supports PROFIsafe over PROFINET communication.

For more information see FSPS-21 PROFIsafe safety functions module web page at new.abb.com/drives/functional-safety




Safe torque off (STO)

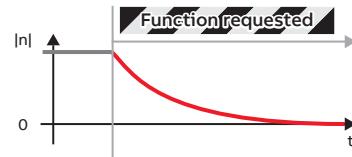

STO is the basic foundation of drive-based functional safety, as it brings a drive safely to no-torque state making the motor coast to stop. Integrated STO-function simplifies the safety circuit as external components are not needed to safely stop the application.

- **STO** is a standard safety function in all ABB drives.
- Typically used for prevention of an unexpected startup
- (EN ISO 14118) of machinery or for an emergency stop, fulfilling stop category 0 (EN 13850 / IEC 60204-1).

Safe stop 1, time controlled (SS1-t)

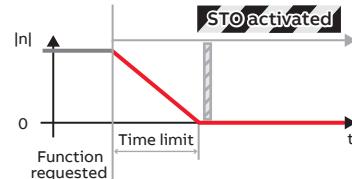

Safe stop 1 stops the motor safely with a controlled ramp stop and stop time monitoring. SS1-t initiates the ramp stop from the drive and activates STO when speed reaches zero. If the drive is not decelerating to zero speed within the time limit, the STO function is activated. SS1-t is typically used in applications where motion must be stopped quickly and safely before switching to a no-torque state.

- **SS1-t** stops the motor safely, using a controlled ramp stop and then activates the STO function.
- **SS1-t** can be used to implement an Emergency stop, fulfilling stop category 1 (EN/IEC 60204-1).



PROFIsafe safety functions module FSPS-21


Option code	Ordering code	Module
+Q986	3AXD50000112821	FSPS-21

Note: This module isn't compatible with other fieldbus option modules for ACS380 and ACS580 drives


Example: SS1-t

Safety function module FSPS-21, functionality cycle


0. Drive running

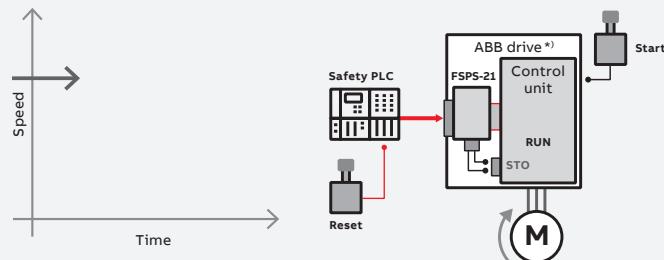


1. Safety PLC – safety function request to the FSPS-21

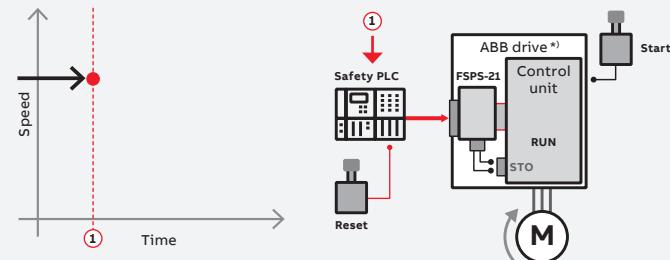


2. SS1-t, safety functions request / start of monitoring

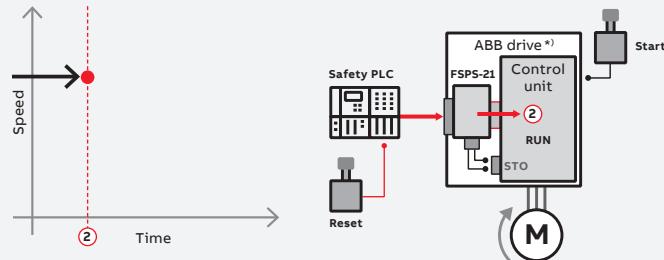


3. Transition and time monitoring of the SS1-t

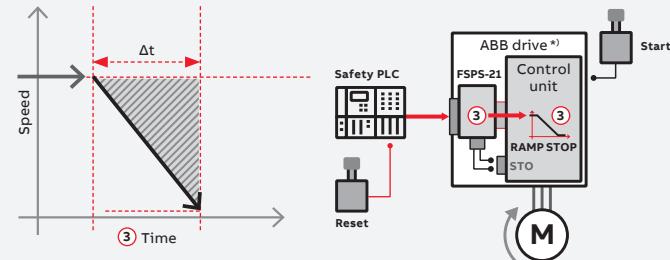


4. Zero speed or SS1-t time limit reached / STO is opened

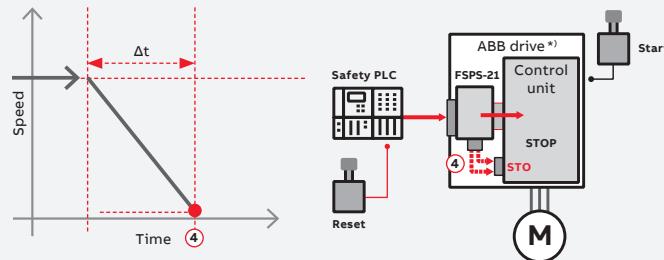


5. Safe state / STO is open

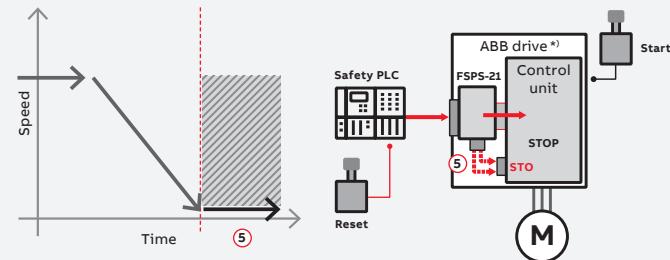

6. Safety function request removed / reset / STO is closed

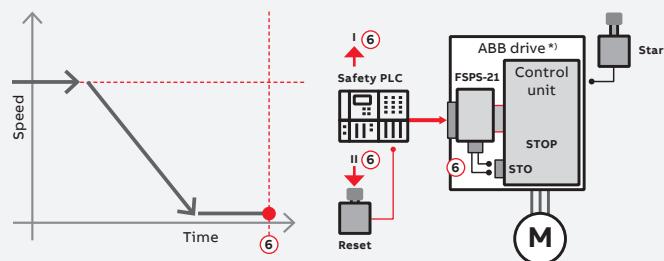

7. Start – return to normal operation

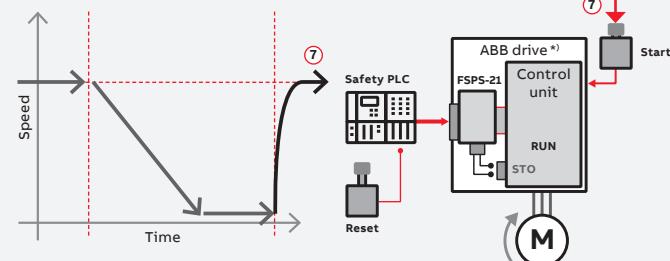

* The ABB drive can be ACS380, ACS580 or ACS880

ABB Ability™ Condition Monitoring for drives

Condition Monitoring gives you fact-based insight into your drives, via KPIs and signal data, to keep your processes moving smoothly. Remote monitoring of your drives lets you identify irregularities before they become problems. This helps you make proactive decisions, built on real-time information – and saves you money!



Solid fact-based decision making

Get the facts, and the history, to help run your operations better and more safely.



Always stay one step ahead of problems

Recognize early signs of possible failures and assess the risks, before they turn into serious operational issues.



Find the root cause of process issues

Remotely access data from ABB drives built-in sensors to track the cause of problems. Get back to smooth operation quickly with data back-ups.



Remotely analyze and optimize drives

Get critical drive information anywhere anytime – even in difficult to access sites, or when a site visit is impossible.

Tailor your drive monitoring to perfectly fit your needs

Our standard package gives you industry leading monitoring capabilities to fit your needs – whether you want to view the drive status through ABB's internet portal or integrate this data with your existing monitoring systems.

Optional services include digitally enabled remote assistance by ABB technical support, advanced analytics and reporting, and a range of other features to make your maintenance operations more effective.

Get these benefits from the standard package of ABB Ability™ Condition Monitoring for drives

- **Condition Monitoring** – Continuously monitor your drive performance remotely through ABB portal, without need for on-site presence, or through your own monitoring system using data transfer via **Cloud Interface**
- **Alarm Management** – Create flexible alerts and warning notifications, and have them sent to the right people for rapid action
- **Asset Health** – Generate professional maintenance reports, tailored to your needs, about the state of your drives
- **Team Support** – Wherever you are, you can access and analyze drive signal data and information, and then provide valuable support to your team
- **Backup Management** – Back up and safely protect your drive parameters

And select from these options, based on your situation

- + **Powertrain Monitoring** – Combine Condition Monitoring for drives with our Smart Sensors for motors and bearings, to monitor your complete powertrain
- + **Condition-Based Maintenance** – Assess the risk profiles of your drives to do efficient, proactive maintenance, based on condition rather than routines
- + **Offline Data Collection** – Upload and analyze data from your drives without using on-line connectivity to the internet
- + **Expert Reports** – Get our drive professionals to review your data and advise on maintenance planning, with our ABB Expert Report service option
- + **Remote Assistance** – Connect to ABB's helpdesk, to get expert support and problem solving, with full visibility of your drives online



Make decisions based on accurate, real-time information

The connectivity devices that enable remote viewing and monitoring

NETA-21	Ordering code	Description
	3AU0000094517	2 x panel bus interface max. 9 drives 2 x Ethernet interface SD memory card

NETA-21

NETA-21 connects the drive to the cloud via the Internet or local Ethernet network.

- The module comes with a built-in web server and requires no Flash/Java plugins
- In the absence of a customer local area network, it can be connected via a mobile network router (either Ethernet or USB network adapter)
- One module can be connected to several drives at the same time



Monitor your drives condition from anywhere at anytime and identify potential problems before they occur

EMC – electromagnetic compatibility

What is EMC?

EMC stands for electromagnetic compatibility. It is the ability of electrical/electronic equipment to operate without problems in an electromagnetic environment.

Likewise, the equipment must not disturb or interfere with any other product or system in its locality. This is a legal requirement for all equipment taken into service within the European Economic Area (EEA).

Installation environments

A power drive system (PDS) can be connected to either industrial or public power distribution networks. The environment class depends on the way the PDS is connected to power supply.

The **1st environment** includes domestic premises. It also includes establishments directly connected without an intermediate transformer to a low voltage power supply network that supplies buildings used for domestic purposes.


The **2nd environment** includes all establishments directly connected to public low voltage power supply networks.

EMC solutions


To fulfill the EMC requirements, the drives are equipped with standard or optional RFI filtering for HF disturbances.

- Using ferrite rings in power connection points
- Using an AC or DC choke (while they are meant to protect against harmonics, they reduce HF disturbances as well)
- Using an LCL filter in the case of regenerative drives
- Using a du/dt filter

Immunity and emission compatibility

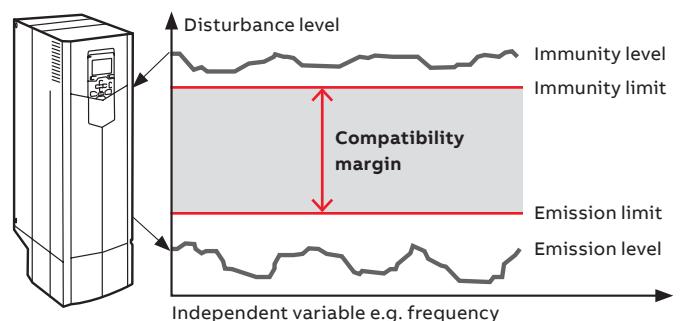

Installation environments

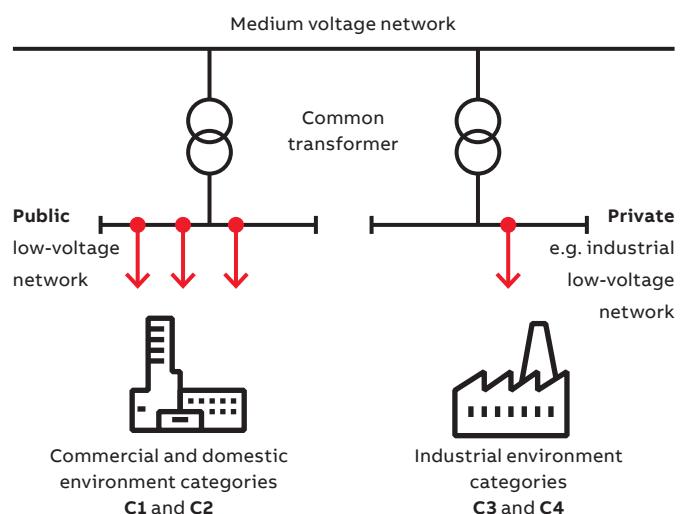

The product standard EN 61800-3 divides PDSs into four categories according to the intended use

C1 – 1st environment

- Household appliances
- Usually plug connectible to any wall outlet
- Anyone can connect these to the network
- Examples: washing machines, TV sets, computers, microwave ovens, etc.

C2 – 1st environment

- Fixed household and public appliances
- Need to be installed or operated by a professional
- Examples: elevators, rooftop fans, residential booster pumps, gates and barriers, supermarket freezers, etc.

C3 – 2nd environment

- Professional equipment
- Needs to be installed or operated by a professional
- In some rare cases, may also be pluggable
- Examples: any equipment for industrial usage only, such as conveyors, mixers, etc.

C4 – 2nd environment

- Professional equipment
- Needs to be fixed installation and operated by a professional
- Examples: paper machines, rolling mills, etc.



Every ACS580 drive is equipped with a built-in filter to reduce high-frequency emissions.

EMC product standard (EN 61800-3) category C2 is fulfilled in wall-mounted drives and in cabinet-built drives up to frame size R9. Category C3 is fulfilled in drive modules and cabinet-built drives (frames R10 and R11) with no external filters.

Comparison of EMC standards

EN 61800-3, product standard	EN 61800-3, product standard	EN 55011, product family standard for industrial, scientific and medical (ISM) equipment	EN 6100-6-4, generic emission standard for industrial environments	EN 61000-6-3, generic emission standard for residential, commercial and light-industrial environment
Category C1	1 st environment, unrestricted distribution	Group 1. Class B	Not applicable	Applicable
Category C2	1 st environment, restricted distribution	Group 1. Class A	Applicable	Not applicable
Category C3	2 nd environment, unrestricted distribution	Group 2. Class A	Not applicable	Not applicable
Category C4	2 nd environment, restricted distribution	Not applicable	Not applicable	Not applicable

EMC compliance and maximum cable length of ACS580-01/07 units *)

Type	Voltage	Frame sizes	1 st environment, restricted distribution, C1, grounded network (TN)	1 st environment, restricted distribution, C2, grounded network (TN)	2 nd environment, unrestricted distribution, C3, grounded network (TN)	2 nd environment, unrestricted distribution, C3, ungrounded network (IT)
ACS580-01	380-480 V	R1-R5	With the plus codes: +F316, +E223	Standard device, cable length 100 m	Standard device, cable length 100 m	-
ACS580-01/07	380-480 V	R6-R9	-	Standard device, cable length 150 m	Standard device, cable length 150 m	-
ACS580-04/07	380-480 V	R10-R11	-	-	Standard device, cable length 100 m	-

*) Motor cable operational functionality up to 300 m. See ACS580 hardware manuals 3AXD50000018826, 3AXD50000015497, 3AXD50000045815 and 3AXD50000032622 for frame specific information.

Harmonic mitigation


What are harmonics?

Harmonic currents are created by non-linear loads connected to the power distribution system. Harmonic distortion is a form of pollution in the electric plant that can cause problems if the voltage distribution caused by harmonic currents increases above certain limits.

All power electronic converters used in different types of electronic systems can increase harmonic disturbances by injecting harmonic currents directly into the grid.

Electricity supply is hardly ever a pure sine wave voltage, and current that deviates from the sine form contains harmonics. The distortion is caused by non-linear loads connected to the electrical supply. Harmonics cause disturbances and equipment failures.


The total current as the sum of the fundamental and 5th harmonics

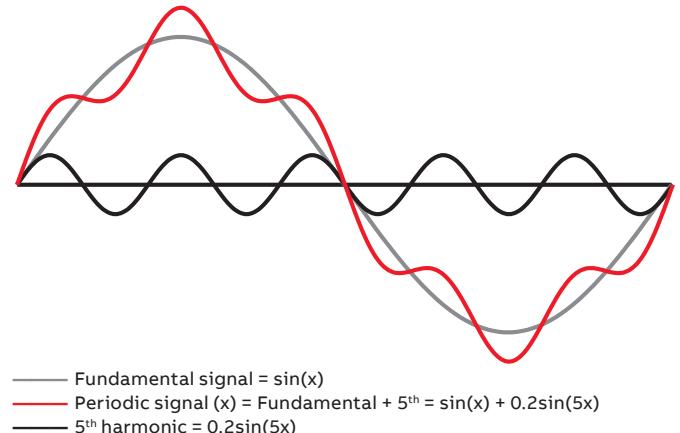

Where do the harmonics come from?

Non-linear loads such as:

- Variable speed drives
- Uninterrupted power supplies (UPS)
- Industrial rectifiers
- Welding machines
- Fluorescent lighting systems (electronic ballast)
- Computers
- Printers
- Servers
- Electronic appliances

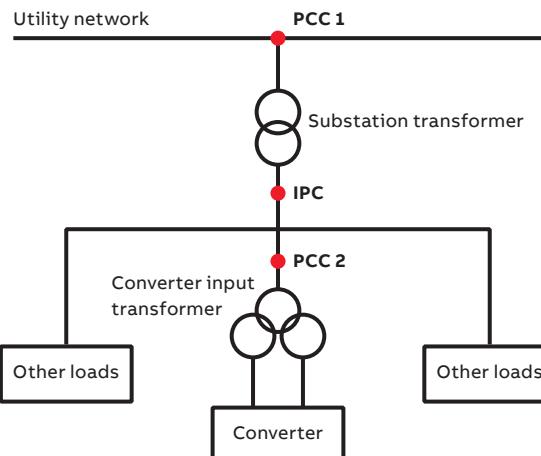

- Point of common coupling (PCC) is the point where the harmonic distortion is specified, e.g.
 - between the plant and the utility network (PCC1)
 - between the non-linear load and other loads within an industrial plant (PCC 2)

- In-plant point of coupling (IPC) is the point inside the customer system or installation to be studied

The effects of harmonic distortions

Harmonic currents

Mainly affect the power distribution system up to the rectifier:

- Additional losses in wires and cables
- Extra heating of transformers
- Circuit breaker malfunctioning

Harmonic voltage

Can affect other equipment connected to the electrical system:

- Erratic operation of telecommunication systems, computers, video monitors, electronic test equipment, etc.
- Resonance with power factor correction capacitors

ACS580 drives are compliant with EN 61000-3-12. They are equipped with:

- optimized DC choke (R1-R9)
- AC chokes (R10-R11)

By choosing the ACS580, you can automatically make your plant more reliable. Built-in chokes mitigate harmonics reducing disturbances and equipment failures. Smaller harmonic content also saves money and makes the installation easier because it allows smaller fuses and longer motor cables to be used. Less harmonics also means longer lifetime for the components and thus less maintenance needs and downtime.



Reliable operation




Reduced cost



Longer lifetime

Drive system features affecting harmonics

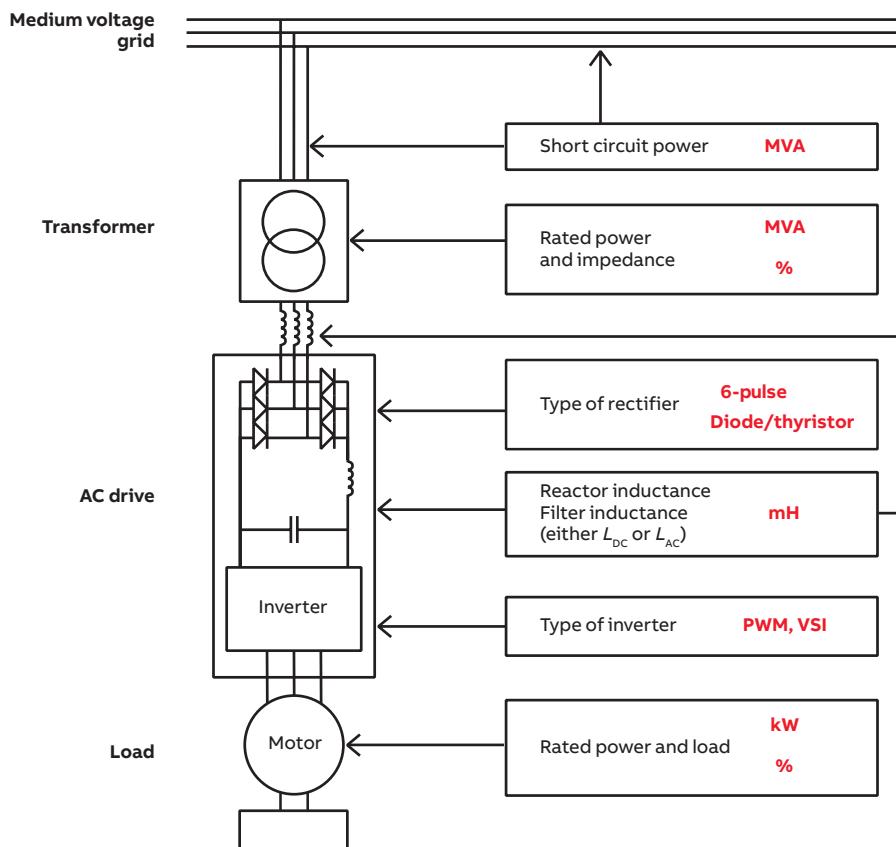

Harmonics reduction can be achieved either by structural modifications in the drive system or by using external filtering. The structural modifications may be to strengthen the supply, or to use 12 or more pulse drives, to use a controlled rectifier, or to improve the internal filtering in the drive.

The image to the left shows the factors in the AC drive system that have some influence on harmonics. The current harmonics depend on the drive construction, and the voltage harmonics are the current harmonics multiplied by the supply impedances.

For explosive atmospheres

ATEX certified

What is a potentially explosive atmosphere and where can it be?

Explosive atmospheres occur when flammable gases, mist, vapors or dust are mixed with air, which creates a risk of explosion. A potentially explosive area is defined as a location where there is a risk of flammable mixes. These atmospheres can be found throughout industries, from **chemical, pharmaceutical and food**, to **power and wood processing**. The electrical equipment that is installed in such locations must be designed and tested to endure these conditions and guarantee a safe function.



What does ATEX mean?

The term ATEX comes from the French words "ATmosphères EXplosibles", and it is a combination of two EU directives: the Worker Protection Directive 1999/92/EC and the Product Directive 2014/34/EU. **The ATEX Directives are designed to protect employees, the public and the environment from accidents owing to explosive atmospheres.**

ATEX provides similar guidelines to the IECEx System, with a few exceptions, and with certification of protective devices (e.g. drive-integrated safety functions).




How to ensure safe operation?

With ABB's ATEX-certified offering and services, safe operation can be ensured.


Motors are directly connected to the machines in the potentially explosive atmosphere, and certain issues need to be considered when selecting a motor together with a drive. These atmospheres have a defined zone classification, and the zone defines the minimum requirements (category) the motors must comply with. The category defines the permitted motor protection types.

Potentially explosive atmosphere zones

Within industries, all potentially explosive atmospheres are required to have an area classification called Zones. Globally, a Zone system is used to classify potentially explosive areas. The Worker Protection Directive 1999/92/EC and the EU standards IEC 60079-10-x, EN 60079-10-x define these zones. In all cases, the owner of the site where the potentially explosive atmosphere exists has the responsibility to define the zones according to the requirements.

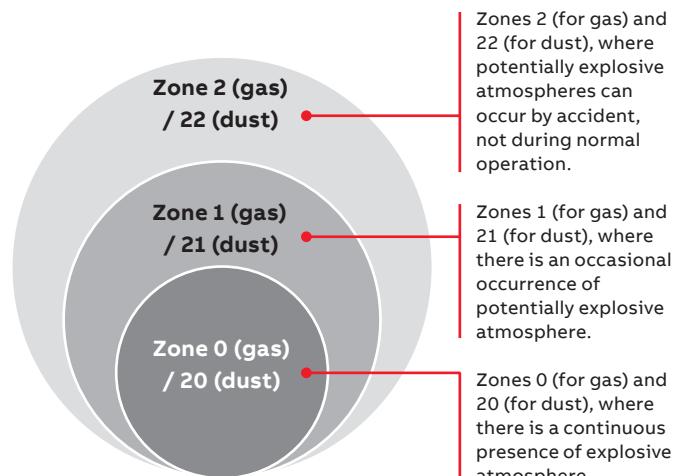

Tested packages



Motor and drive combinations are **tested and certified in ABB's test center**. By using an ABB motor together with an ABB drive as a package, you can enjoy the benefits of efficient, high-performance motors with optimal speed and control accuracy – without compromising on safety.

With the ABB ATEX certified motor and drive package the ATEX certified temperature protection modules are not obligatory, the tested combinations fulfill the IEC/ATEX standards and ensure safe performance.

- No additional testing and certification are needed
- No ATEX thermistor protection modules are needed
- Safe and cost effective solution for industries in potentially explosive atmospheres

Safe temperature monitoring



For non-tested and certified motors and drives (e.g. for use with other manufacturer's motors), ATEX certified temperature protection is an integrated option.

The ACS580's ATEX-certified thermistor protection module, Ex II (2) GD, CPTC-02, can be integrated into the drive if the motor is operating in a potentially explosive environment. **The purpose of the safety function is to disconnect the motor from the power supply before the motor overheats and causes a risk of explosion in an ATEX environment.**

Correct dimensioning



Correct dimensioning is important. **Correctly sized motors and drives reduce motor frame heating and sparks from bearing currents.** They also help to reduce energy use.

Insulation and drive filters



ABB's offering for correct insulation and filters **protects the motor** from voltage phenomena, bearing currents and motor overheating. The insulation and filters must be selected according to voltage and frame size.

Easy drive upgrades



With the drive upgrades below, the ATEX certification stays valid from the old to the new generation models. This means that there is no need for new ATEX certification during the upgrade. This saves you time and money.

ATEX certification approved – old generation model	Comparable converter upgrade	ATEX certification stays valid – new generation model
ACS550	→	ACS580


Global service and support network



ABB's global network of certified service providers are trained and experienced to help you with motors and drives for applications in explosive atmospheres.

The support network ensures that your ABB Declaration of Conformity is retained.

ABB's ATEX-certified thermistor protection module, Ex II (2) GD, CPTC-02

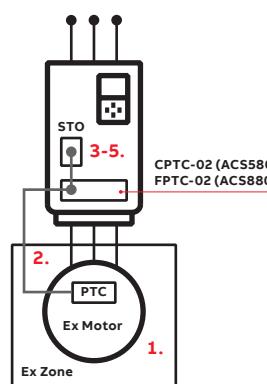

With option +L537 +Q971:

1. Motor temperature rises above the PTC sensor limit temperature.
2. The sensor resistance increases very sharply and indicates overheating to the ATEX-certified module, Ex II (2) GD.
3. The module switches the STO (safe torque off) circuit off, which activates the STO function.
4. The STO function disables the control voltage in the power semiconductors of the drive output stage.
5. The drive is prevented from generating the required torque to rotate the motor.

► **The safe state is guaranteed**

Note:

The CPTC-02 module can be managed as a loose option and can also be retrofitted to the drive; in this case, to be compliant with regulations, the customer must ensure the following requirements:

- that the serial number of the drive/inverter module starts with 1, 4, 7, 8 or Y
- that the drive and option serial number is paired in a DIB (Drive Installed Base) portal
- that the included ATEX label for the SMT (Safe Motor Temperature) function is attached to the drive/inverter module to ensure the ATEX compliance of the safety circuit
- that the option module is installed in an option slot of the drive control unit and the applicable drive parameters are set
- that the PTC temperature sensors of the motor are connected to the PTC inputs of the option module.

* For further information please contact local ABB

Cooling and fuses

Cooling

ACS580 drives are fitted with variable-speed cooling air fans. The cooling air must be free from corrosive materials and not exceed the maximum ambient temperature of 40 °C for frames R1 to R9 (50 °C with derating). The speed-controlled fans cool the drive only when needed, which reduces overall noise level and energy consumption.

Fuse connections

Standard fuses can be used with ABB general purpose drives. For input fuses, see the table below.

Wall-mounted drives, ACS580-01

Cooling air flow and recommended input protection fuses for 380 to 480 V units

Type designation	Frame size	Cooling air flow 380 to 480 V units					Recommended input protection fuses for 380 to 480 V units ***)			
		Heat dissipation *)		Air flow		Max. noise level **)	IEC fuses		UL fuses	
		(W)	(BTU/Hr)	(m³/h)	(ft³/min)		(A)	Fuse type	(A)	Fuse type
ACS580-01-02A7-4	R1	45	155	43	25	55	4	gG	15	UL Class T
ACS580-01-03A4-4	R1	55	187	43	25	55	6	gG	15	UL Class T
ACS580-01-04A1-4	R1	66	224	43	25	55	6	gG	15	UL Class T
ACS580-01-05A7-4	R1	84	288	43	25	55	10	gG	15	UL Class T
ACS580-01-07A3-4	R1	106	362	43	25	55	10	gG	15	UL Class T
ACS580-01-09A5-4	R1	133	454	43	25	55	16	gG	15	UL Class T
ACS580-01-12A7-4	R1	174	593	43	25	55	16	gG	15	UL Class T
ACS580-01-018A-4	R2	228	777	101	59	66	25	gG	30	UL Class T
ACS580-01-026A-4	R2	322	1100	101	59	66	32	gG	30	UL Class T
ACS580-01-033A-4	R3	430	1469	179	105	70	40	gG	40	UL Class T
ACS580-01-039A-4	R3	525	1791	179	105	70	50	gG	60	UL Class T
ACS580-01-046A-4	R3	619	2114	179	105	70	63	gG	60	UL Class T
ACS580-01-062A-4	R4	835	2852	134	79	69	80	gG	80	UL Class T
ACS580-01-073A-4	R4	1024	3497	134	79	69	100	gG	90	UL Class T
ACS580-01-088A-4	R5	1240	4235	139	82	63	100	gG	110	UL Class T
ACS580-01-106A-4	R5	1510	5157	139	82	63	125	gG	150	UL Class T
ACS580-01-145A-4	R6	1476	5041	435	256	67	160	gG	200	UL Class T
ACS580-01-169A-4	R7	1976	6748	450	265	67	250	gG	225	UL Class T
ACS580-01-206A-4	R7	2346	8012	450	265	67	315	gG	300	UL Class T
ACS580-01-246A-4	R8	3336	11393	550	324	65	355	gG	350	UL Class T
ACS580-01-293A-4	R8	3936	13442	550	324	65	425	gG	400	UL Class T
ACS580-01-363A-4	R9	4836	16516	1150	677	68	500	gG	500	UL Class T
ACS580-01-430A-4	R9	6036	20614	1150	677	68	630	gG	600	UL Class T

*) Heat dissipation value is a reference for cabinet thermal design.

**) The maximum noise level at full fan speed. When the drive is not operating at full load and at maximum ambient temperature the noise level is lower.

***) For detailed fuse sizes and types, please see the ACS580 HW manuals, document codes: 3AXD5000018826 and 3AXD5000015497.

Note: For flange mounting, please refer to the ACS580 HW manuals, document codes: 3AXD5000018826 and 3AXD5000015497.

Wall-mounted drives, ACS580-01 230 V

Cooling air flow and recommended input protection fuses for 200 to 240 V units

Type designation	Frame size	Cooling air flow 200 to 240 V units					Recommended input protection fuses for 200 to 240 V units	
		Heat dissipation *)			Air flow	Max. noise level **)	IEC fuses	
		(W)	(BTU/Hr)	(m³/h)	(ft³/min)	(dBA)	(A)	Fuse type
ACS580-01-04A7-2	R1	45	155	43	25	59	25,0	gG
ACS580-01-06A7-2	R1	55	187	43	25	59	25,0	gG
ACS580-01-07A6-2	R1	66	224	43	25	59	25,0	gG
ACS580-01-012A-2	R1	106	362	43	25	59	25,0	gG
ACS580-01-018A-2	R1	133	454	43	25	59	25,0	gG
ACS580-01-025A-2	R2	174	593	101	59	64	40,0	gG
ACS580-01-032A-2	R2	228	777	101	59	64	40,0	gG
ACS580-01-047A-2	R3	322	1100	179	105	76	63,0	gG
ACS580-01-060A-2	R3	430	1469	179	105	76	63,0	gG
ACS580-01-089A-2	R5	619	2114	139	82	63	125,0	gG
ACS580-01-115A-2	R5	835	2852	139	82	63	125,0	gG
ACS580-01-144A-2	R6	1035	3535	435	256	67	200	gG
ACS580-01-171A-2	R7	1251	4272	450	265	67	250	gG
ACS580-01-213A-2	R7	1521	5194	450	265	67	315	gG
ACS580-01-276A-2	R8	2061	7039	550	324	65	400	gG

Drive modules, ACS580-04

Cooling air flow and recommended input protection fuses for 380 to 480 V units

Type designation	Frame size	Cooling air flow 380 to 480 V units					Recommended input protection fuses for 380 to 480 V units ***)			
		Heat dissipation *)			Air flow	Max. noise level **)	IEC fuses		UL fuses	
		(W)	(BTU/Hr)	(m³/h)	(ft³/min)	(dBA)	(A)	Fuse type	(A)	Fuse type
ACS580-04-505A-4	R10	5602	19132	1200	707	72	***)	***)	***)	***)
ACS580-04-585A-4	R10	6409	21888	1200	707	72	***)	***)	***)	***)
ACS580-04-650A-4	R10	8122	27738	1200	707	72	***)	***)	***)	***)
ACS580-04-725A-4	R11	8764	29931	1200	707	72	***)	***)	***)	***)
ACS580-04-820A-4	R11	9862	33680	1200	707	72	***)	***)	***)	***)
ACS580-04-880A-4	R11	10578	36126	1420	848	72	***)	***)	***)	***)

*) Heat dissipation value is a reference for cabinet thermal design.

**) The maximum noise level at full fan speed. When the drive is not operating at full load and at maximum ambient temperature the noise level is lower.

***) For detailed fuse sizes and types, please see the ACS580 HW manuals, document codes: 3AXD50000018826 and 3AXD50000015497.

Cabinet-built drives, ACS580-07

Cooling air flow and recommended input protection fuses for 380 to 480 V units

Type designation	Frame size	Cooling air flow 380 to 480 V units					Recommended input protection fuses for 380 to 480 V units ***)			
		Heat dissipation *)			Air flow	Max. noise level **)	IEC fuses		UL fuses	
		(W)	(BTU/Hr)	(m³/h)	(ft³/min)	(dBA)	(A)	Fuse type	(A)	Fuse type
ACS580-07-0145A-4	R6	2487	8485	685	403	67	250	170M3816D	250	DFJ-250
ACS580-07-0169A-4	R7	2497	8519	700	412	67	250	170M3816D	300	DFJ-300
ACS580-07-0206A-4	R7	3314	11307	700	412	67	315	170M3817D	300	DFJ-300
ACS580-07-0246A-4	R8	3806	12987	800	471	65	400	170M5408	400	170M5408
ACS580-07-0293A-4	R8	4942	16863	800	471	65	500	170M5410	500	170M5410
ACS580-07-0363A-4	R9	5868	20024	1400	824	68	630	170M6410	630	170M6410
ACS580-07-0430A-4	R9	7600	25932	1400	824	68	700	170M6411	700	170M6411
ACS580-07-0505A-4	R10	8353	28502	1900	1118	72	800	170M6412	***)	***)
ACS580-07-0585A-4	R10	9471	32317	1900	1118	72	900	170M6413	***)	***)
ACS580-07-0650A-4	R10	11200	38215	1900	1118	72	1000	170M6414	***)	***)
ACS580-07-0725A-4	R11	11386	38851	2400	1413	72	1250	170M6416	***)	***)
ACS580-07-0820A-4	R11	13725	46831	2400	1413	72	1250	170M6416	***)	***)
ACS580-07-0880A-4	R11	15300	52207	2620	1542	72	1400	170M6417	***)	***)

*) Heat dissipation value is a reference for cabinet thermal design.

**) The maximum noise level at full fan speed. When the drive is not operating at full load and at maximum ambient temperature the noise level is lower.

***) For detailed fuse sizes and types, please see the ACS580 HW manuals, document codes: 3AXD50000018826, 3AXD50000015497, 3AXD50000045815 and 3AXD50000032622.

Circuit breakers

ACS580-01

Type designation ACS580-01-	Frame size	Aux. Contr. Volt.:	Miniature circuit breaker	T_{max} moulded case circuit breaker	Switch-disconnector			Main contactor (≤40 °C)
					Main Switch	Main Switch UL	ABB type	
3-phase, $U_N = 400$ or 480 V (380...415 V, 440...480 V)								
02A7-4	R1	230/115	S 203P-B/C/Z 10		–	OT16F3	OT16F3	AF09-30-22-13
03A4-4	R1	230/115	S 203P-B/C/Z 10		–	OT16F3	OT16F3	AF09-30-22-13
04A1-4	R1	230/115	S 203P-B/C/Z 10		–	OT16F3	OT16F3	AF09-30-22-13
05A7-4	R1	230/115	S 203P-B/C/Z 10		–	OT16F3	OT16F3	AF09-30-22-13
07A3-4	R1	230/115	S 203P-B/C/Z 10		–	OT16F3	OT16F3	AF09-30-22-13
09A5-4	R1	230/115	S 203P-B/C/Z 10		–	OT16F3	OT16F3	AF09-30-22-13
12A7-4	R1	230/115	S 203P-B/C/Z 16		–	OT16F3	OT16F3	AF09-30-22-13
018A-4	R2	230/115	S 203P-B/C/Z 20		–	OT25F3	OT25F3	AF09-30-22-13
026A-4	R2	230/115	S 203P-B/C/Z 25		–	OT25F3	OT25F3	AF12-30-22-13
033A-4	R3	230/115	S 203P-B/C/Z 32		–	OT63F3	OT63F3	AF26-30-22-13
039A-4	R3	230/115	S 203P-B/C/Z 40		–	OT63F3	OT63F3	AF52-30-22-13
046A-4	R3	230/115	S 203P-B/C/Z 50		–	OT63F3	OT63F3	AF52-30-22-13
062A-4	R4	230/115	S 803 S-B/C 75		–	OT100F	OT100F	AF52-30-22-13
073A-4	R4	230/115	–	1SDA067918R1 Prospective SC current 65kA	OT100F	OT100F	AF52-30-22-13	
088A-4	R5	230/115	–	1SDA067918R1 Prospective SC current 65kA	OT160EV	OT200U	AF65-30-22-13	
106A-4	R5	230/115	–	1SDA068555R1 Prospective SC current 65kA	OT160EV	OT200U	AF146-30-22-13	
145A-4	R6	230/115	–	1SDA068555R1 Prospective SC current 65kA	OT160EV	OT200U	AF146-30-22-13	
169A-4	R7	230/115	–	1SDA068555R1 Prospective SC current 65kA	OT250E	OT400U	AF146-30-22-13	
206A-4	R7	230/115	–	1SDA054141R1 Prospective SC current 65kA	OT250E	OT400U	AF146-30-22-13	
246A-4	R8	230/115	–	1SDA054365R1 Prospective SC current 65kA	OT400E	OT400U	AF265-30-22-13	
293A-4	R8	230/115	–	1SDA054420R1 Prospective SC current 65kA	OT400E	OT400U	AF265-30-22-13	
363A-4	R9	230/115	–	1SDA054420R1 Prospective SC current 65kA	OT630E	OT600U	AF400-30-22-70	
430A-4	R9	230/115	–	1SDA054420R1 Prospective SC current 65kA	OT630E	OT600U	AF400-30-22-70	

ACS580-04

Type designation ACS580-04-	Frame size	Aux. Contr. Volt.:	Miniature circuit breaker	T_{max} moulded case circuit breaker	Switch-disconnector			Main contactor (≤40 °C)
					Main Switch	Main Switch UL	ABB type	
$U_N = 380$...480 V (380, 400, 415 V)								
505A-4	R10	230/115	–	1SDA054412R1 (T5H 630 PR221DS-LS/ $I_{n_1} = 630$ 3p FF)	OT630E	OT600U	–	
585A-4	R10	230/115	–	1SDA069428R1 (T6V 800 PR221DS-LS/ $I_{n_1} = 800$ 3p FF)	OT630E	OT600U	–	
650A-4	R10	230/115	–	1SDA069428R1 (T6V 800 PR221DS-LS/ $I_{n_1} = 800$ 3p FF)	OT800E	OT800U	–	
725A-4	R11	230/115	–	1SDA062770R1 (T7H 1000 PR231/P LS/ $I_{n_1} = 1000$ A 3p FF)	OT800E	OT800U	–	
820A-4	R11	230/115	–	1SDA062770R1 (T7H 1000 PR231/P LS/ $I_{n_1} = 1000$ A 3p FF)	OT1000E	OT1200U	–	
880A-4	R11	230/115	–	1SDA062770R1 (T7H 1000 PR231/P LS/ $I_{n_1} = 1000$ A 3p FF)	OT1000E	OT1200U	–	

du/dt filters

du/dt filtering suppresses inverter output voltage spikes and rapid voltage changes that stress motor insulation. Additionally, du/dt filtering reduces capacitive leakage currents and high-frequency emissions from the motor cable as well as high-frequency losses and bearing currents in the motor. The need for du/dt filtering depends on the motor insulation. For information on the construction of the motor insulation, consult the manufacturer. More information on the du/dt filters can be found in the ACS580 hardware manual.

External du/dt filter for ACS580-01 and ACS580-04

		du/dt filter type * 3 filters included, dimensions apply to one filter.		
		Unprotected (IP00)	Protected to IP22	Protected to IP54
ACS580	NOCH0016-60			
400 V	NOCH0030-60	●		
	NOCH0070-60	●		
	NOCH0120-60*	●		
	FOCH0260-70	●		
	FOCH0320-50	●		
	FOCH0610-70	●		
	FOCH0875-70	●		
	NOCH0016-62			
	NOCH0030-62			
	NOCH0070-62			
	NOCH0120-62			
	NOCH0016-65			
	NOCH0030-65			
	NOCH0070-65			
	NOCH0120-65			
	BOCH-0880A-7			
ACS580-01-02A7-4	●	●	●	
ACS580-01-03A4-4	●	●	●	
ACS580-01-04A1-4	●	●	●	
ACS580-01-05A7-4	●	●	●	
ACS580-01-07A3-4	●	●	●	
ACS580-01-09A5-4	●	●	●	
ACS580-01-12A7-4	●	●	●	
ACS580-01-018A-4	●	●	●	
ACS580-01-026A-4	●	●	●	
ACS580-01-033A-4	●	●	●	
ACS580-01-039A-4	●	●	●	
ACS580-01-046A-4	●	●	●	
ACS580-01-062A-4	●	●	●	
ACS580-01-073A-4	●	●	●	
ACS580-01-088A-4	●	●	●	
ACS580-01-106A-4	●	●	●	
ACS580-01-145A-4	●			
ACS580-01-169A-4	●			
ACS580-01-206A-4	●			
ACS580-01-246A-4	●			
ACS580-01-293A-4	●			
ACS580-01-363A-4	●			
ACS580-01-430A-4	●			
ACS580-04-505A-4	●			
ACS580-04-585A-4	●			
ACS580-04-650A-4	●			
ACS580-04-725A-4		●		
ACS580-04-820A-4		●		
ACS580-04-880A-4		●		

External du/dt filters for ACS580-07

		du/dt filter type * 3 filters included, dimensions apply to one filter.	Protected to IP54
ACS580	BOCH-0880A-7		
400 V	COF-01		
	COF-02		
ACS580-07-0145A-4		●	
ACS580-07-0169A-4		●	
ACS580-07-0206A-4		●	
ACS580-07-0246A-4			●
ACS580-07-0293A-4			●
ACS580-07-0363A-4			●
ACS580-07-0430A-4			●
ACS580-07-0505A-4		●	
ACS580-07-0585A-4		●	
ACS580-07-0650A-4		●	
ACS580-07-0725A-4		●	
ACS580-07-0820A-4		●	
ACS580-07-0880A-4		●	

Dimensions and weights of the du/dt filters

du/dt filter	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
NOCH0016-60	195	140	115	2.4
NOCH0016-62/65	323	199	154	6
NOCH0030-60	215	165	130	4.7
NOCH0030-62/65	348	249	172	9
NOCH0070-60	261	180	150	9.5
NOCH0070-62/65	433	279	202	15.5
NOCH0120-60 ³⁾	200	154	106	7
NOCH0120-62/65	765	308	256	45
FOCH0260-70	382	340	254	47
FOCH0320-50	662	319	293	65
FOCH0610-70	662	319	293	65
FOCH0875-70	662	319	293	65
BOCH-0880A-7	400	248	456	18
COF-01	570	296	360	23
COF-02	570	360	301	23

Sine filters

Sine filters are low-pass filters that suppress the high frequency components of the drive output.

A sine filter consists of single- or three-phase reactors and delta- or star-connected capacitors. The sine filter provides true sinusoidal voltage waveform at the drive output by suppressing the high frequency voltage components of the drive output. Suppression of the high frequency voltage components is needed when extra-long motor cables are used, there is a step-up transformer between the drive and a motor, or when a drive is installed with an old direct-on-line motor.

ACS580-01, sine filters			
Type designation	Type code Sine filter IP00	Type code Housing case IP21 *)	$I_{cont. max}$ (A)
3-phase, $U_n = 380...480$ V. The power ratings are valid at nominal voltage 400 V (0.75 to 250 kW).			
ACS580-01-02A7-4	B84143V0004R229	B84143Q0002R229	2.3
ACS580-01-03A4-4	B84143V0004R229	B84143Q0002R229	3.1
ACS580-01-04A1-4	B84143V0004R229	B84143Q0002R229	3.8
ACS580-01-05A7-4	B84143V0006R229	B84143Q0002R229	5.3
ACS580-01-07A3-4	B84143V0011R229	B84143Q0004R229	6.9
ACS580-01-09A5-4	B84143V0011R229	B84143Q0004R229	9.2
ACS580-01-12A7-4	B84143V0016R229	B84143Q0006R229	12.1
ACS580-01-018A-4	B84143V0016R229	B84143Q0006R229	16
ACS580-01-026A-4	B84143V0025R229	B84143Q0008R229	24
ACS580-01-033A-4	B84143V0033R229	B84143Q0008R229	31
ACS580-01-039A-4	B84143V0050R229	B84143Q0010R229	37
ACS580-01-046A-4	B84143V0050R229	B84143Q0010R229	43
ACS580-01-062A-4	B84143V0066R229	B84143Q0010R229	58
ACS580-01-073A-4	B84143V0066R229	B84143Q0010R229	64
ACS580-01-088A-4	B84143V0095R229	B84143Q0012R229	77
ACS580-01-106A-4	B84143V0095R229	B84143Q0012R229	91
ACS580-01-145A-4	B84143V0162S229	B84143Q0014R229	126
ACS580-01-169A-4	B84143V0162S229	B84143Q0014R229	153
ACS580-01-206A-4	B84143V0230S229	B84143Q0016R229	187
ACS580-01-246A-4	B84143V0230S229	B84143Q0016R229	209
ACS580-01-293A-4	B84143V0390S229	B84143Q0018R229	249
ACS580-01-363A-4	B84143V0390S229	B84143Q0018R229	297
ACS580-01-430A-4	B84143V0390S229	B84143Q0018R229	352

*) If a sinus filter IP21 is needed please order both type codes for Housing case IP21 and Sine filter IP00.

Example: if a IP21 sine filter is needed for an ACS580-01-02A7-4 it is necessary to order both

B84143V0004R229 and B84143Q0002R229.

ACS580 drives are compatible with the wide ABB product offering



Programmable Logic Controllers, PLCs

The AC500, AC500-eCo, AC500-S and AC500-XC scalable PLC ranges provide solutions for small, medium and high-end applications. Our AC500 PLC platform offers different performance levels and is the ideal choice for high availability, extreme environments, condition monitoring, motion control or safety solutions.



AC motors

ABB's low voltage AC motors are designed to save energy, reduce operating costs and minimize unscheduled downtime. General performance motors ensure convenience, while process performance motors provide a broad set of motors for the process industries and heavy-duty applications.



Control panels

CP600-eCo, CP600 and CP600-Pro control panels offer a wide range of features and functionalities for maximum operability. ABB control panels are distinguished by their robustness and high usability, providing all the relevant information from production plants and machines at a single touch.



All-compatible drives portfolio

The all-compatible drives share the same architecture: software platform, tools, user interfaces and options. There is an optimal drive from the smallest water pump to the biggest cement kiln, and everything in between.



Automation Builder Engineering suite
ABB Automation Builder is the software for machine builders and system integrators wanting to automate their machines and systems in a unified and efficient way. Automation Builder connects the engineering tools for PLC, safety, control panels, SCADA, drives, motion and robots.




Jokab safety products


ABB Jokab Safety offers an extensive range of innovative products and solutions for machine safety systems. It is represented in standardization organizations for machine safety and works daily with the practical application of safety requirements in combination with production requirements.

ABB Ability™ smartphone apps


Better connectivity and user experience with Drivetune

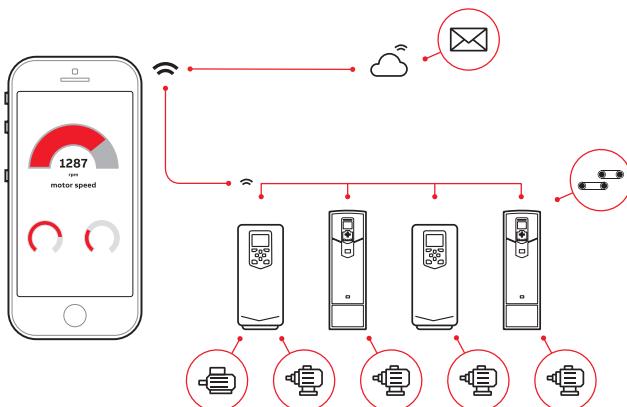


Easy and fast access to product information and support

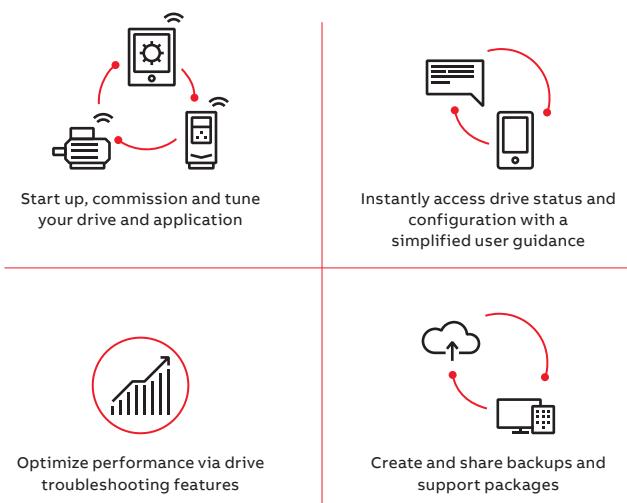

Services and support on the go with Drivebase

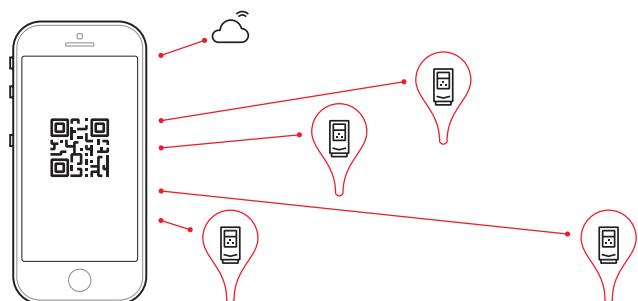

Search for support documents and contacts

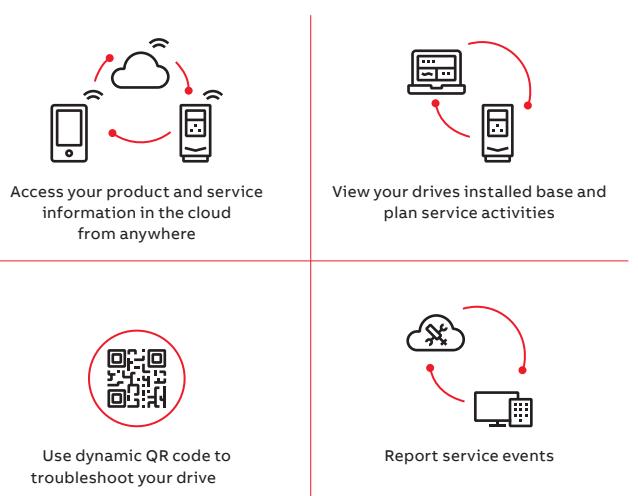

Access information anywhere

Download the apps using the QR codes below or directly from the app stores



Get it on
Google play



Available on the
App Store



Drivetune for commissioning and managing drives



Get it on
Google play



Available on the
App Store



Drivebase for ensured reliability and reduced downtime on production sites



We keep your world turning

Whatever your needs are, we offer the most extensive service offering for drives, motors and generators from spare parts and technical support to cloud-based condition monitoring solutions to keep your equipment running.

The global ABB service units complemented by external Value Providers form a service network on your doorstep. Maximize performance, uptime and efficiency throughout the life cycle of your assets.

With you every step of the way


Even before you buy a generator, drive, motor, bearing or softstarter, ABB's experts are on hand to offer technical advice from dimensioning through to potential energy saving.

When you've decided on the right product, ABB and its global network of Value Providers can help with installation and commissioning. They are also on hand to support you throughout the operation and maintenance phases of the products life cycle, providing maintenance programs tailored to your facility's needs.


ABB will ensure you are aware of any service opportunities. If you've registered your drives and motors with ABB, then its engineers will proactively contact you advising on your most effective service options. All of which helps maximize performance, uptime and efficiency throughout the lifetime of your powertrain.



Replacements
Fast and efficient replacement services to minimize production downtime.




End-of-life services
Responsible dismantling, recycling and reusing of products, according to local laws and industrial standards.



Maintenance
Systematic and organized maintenance and support over the life cycle of your assets.



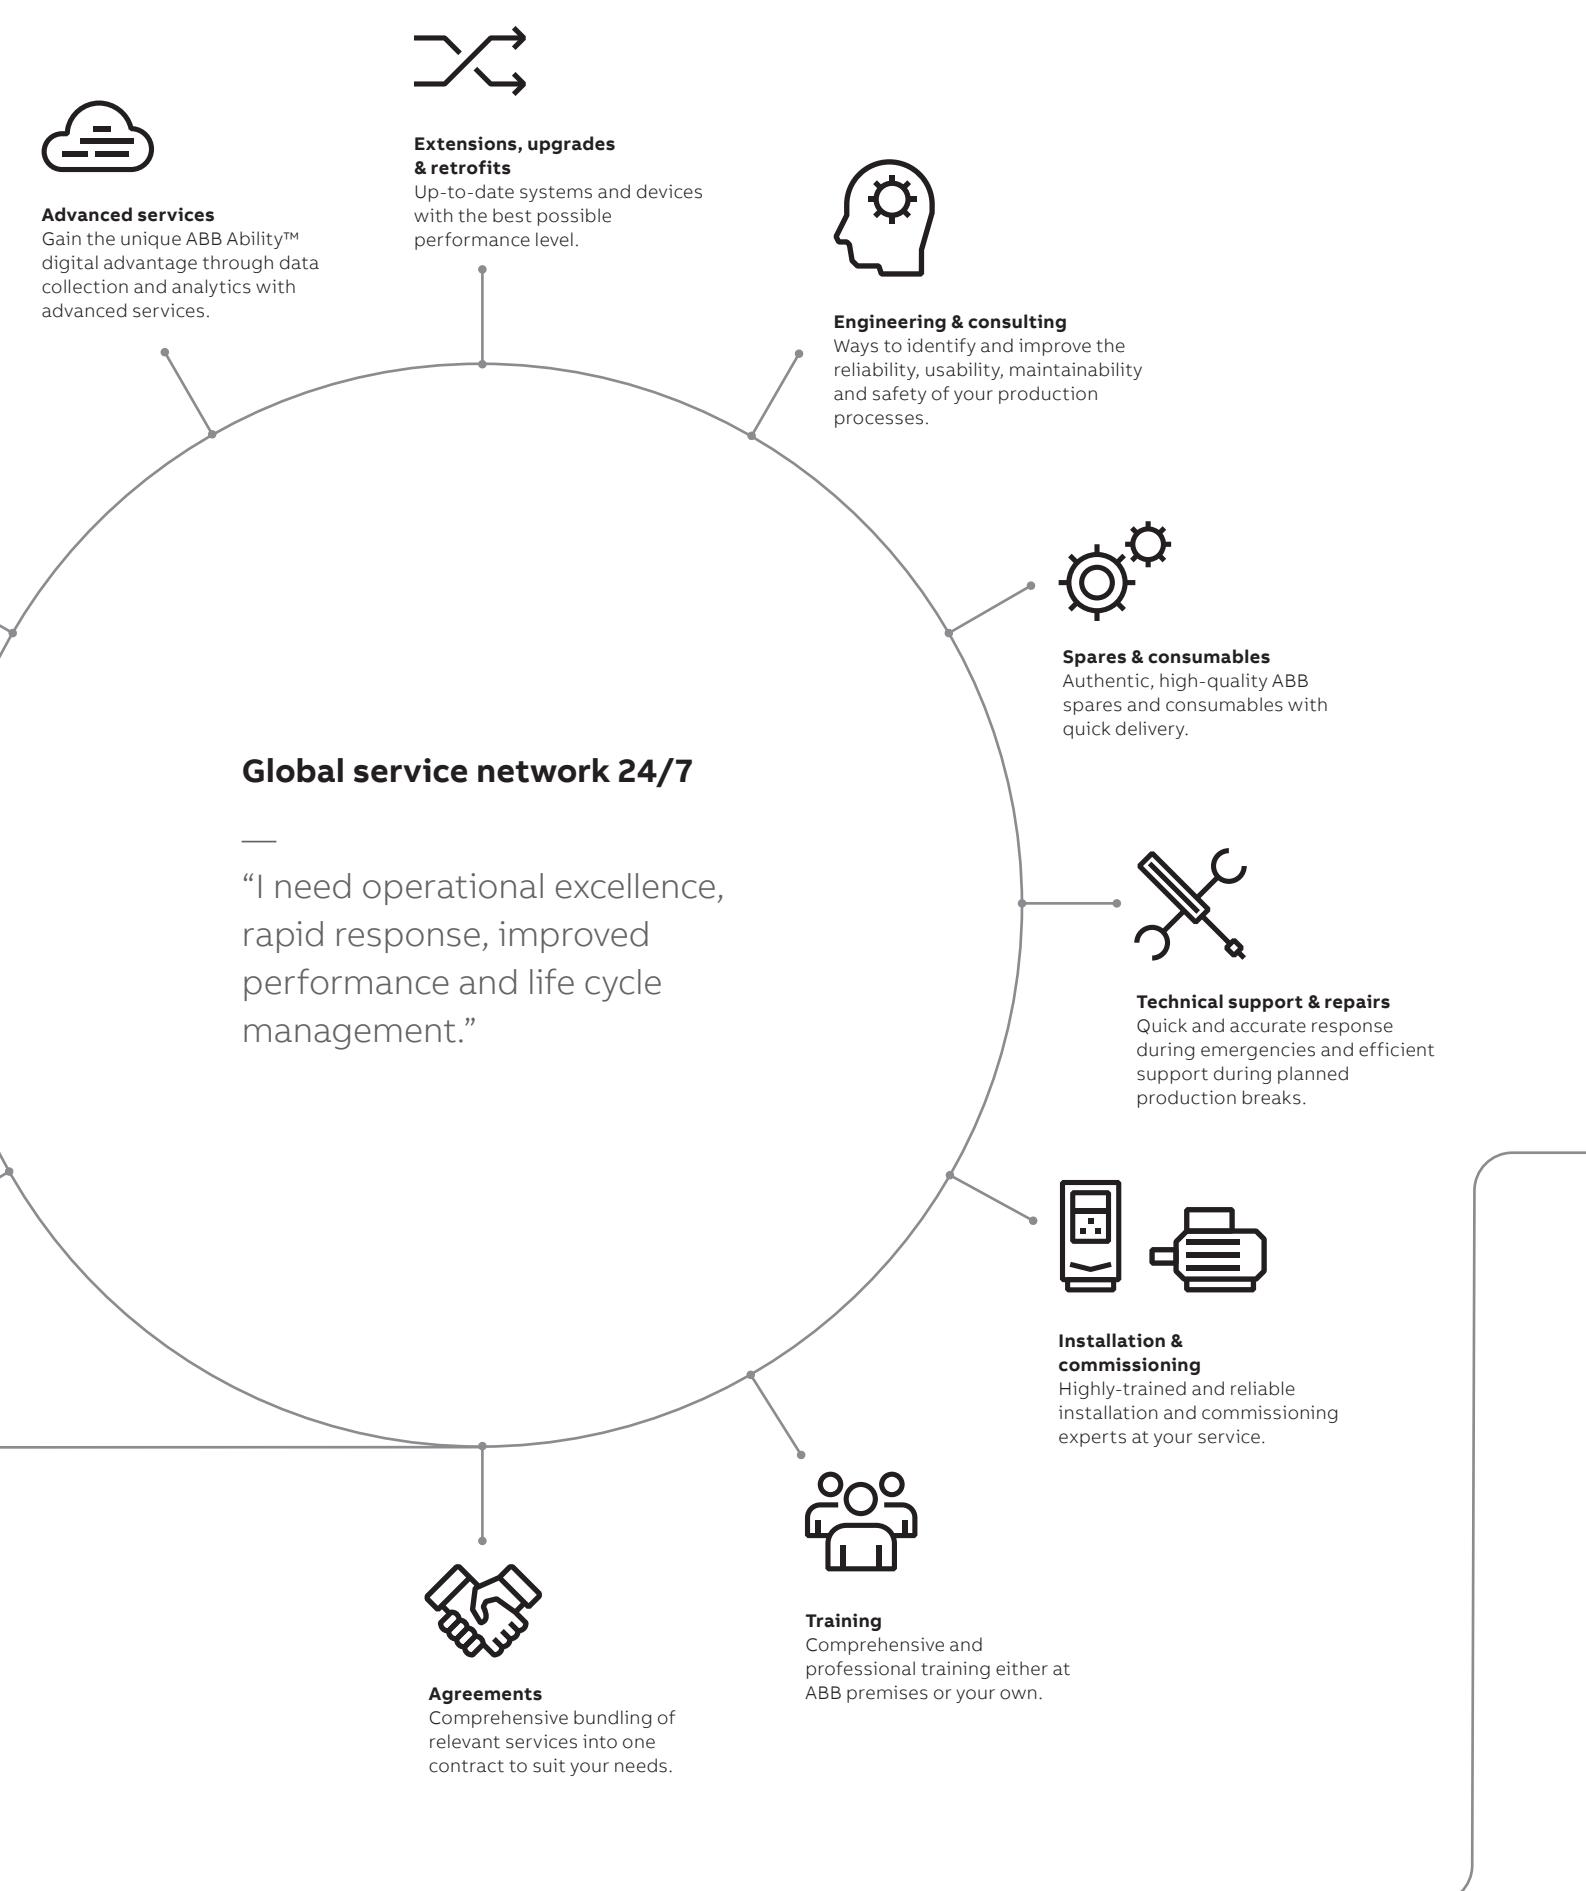

A lifetime of peak performance

You're in control of every life cycle phase of your drives. At the heart of drive services is a four-phase product life cycle management model. This model defines the services recommended and available throughout drives lifespan.

Now it's easy for you to see the exact service and maintenance available for your drives.

ABB drives life cycle phases explained:



	Active	Classic	Limited	Obsolete
Product	Full range of life cycle services and support	Limited range of life cycle services and support	Replacement and end-of-life services	
Services	Product is in active sales and manufacturing phase.	Serial production has ceased. Product may be available for plant extensions, as a spare part or for installed base renewal.	Product is no longer available.	Product is no longer available.
	Full range of life cycle services is available.	Full range of life cycle services is available. Product enhancements may be available through upgrade and retrofit solutions.	Limited range of life cycle services is available. Spare parts availability is limited to available stock.	Replacement and end-of-life services are available.

Keeping you informed

We notify you every step of the way using life cycle status statements and announcements.

Your benefit is clear information about your drives' status and precise services available. It helps you plan the preferred service actions ahead of time and make sure that continuous support is always available.

Step 1

Life Cycle Status Announcement

Provides early information about the upcoming life cycle phase change and how it affects the availability of services.

Step 2

Life Cycle Status Statement


Provides information about the drive's current life cycle status, availability of product and services, life cycle plan and recommended actions.

Ordering information

How do I build an ordering code?

ACS580-01

The type designation tells you the specifications and configuration of the drive.
The table shows the primary drive variants.
Sample type code: ACS580-01-12A7-4+XXXX

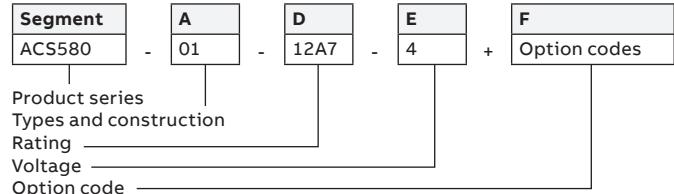

Basic codes

Segment	Option	Description
A	Construction	01 = When no options are selected: Wall mounted, IP21 (UL Type 1), assistant control panel with a USB port, choke, EMC C2 filter (internal EMC filter), safe torque off, braking chopper in frames R1, R2, R3, coated boards, cable lead through entry from the bottom, cable box or the conduit plate with cable entries, quick installation and start-up guide multilingual
D	Current rating	Refer to the rating table
E	Voltage rating	4 = 400/480 V (380...480 V)

Option codes

Segment	Option	Code	Description	
F	Control panel and panel options	+J400 +J425 +J429 +J404 +J424	ACS-AP-S Assistant control panel (as standard) ACS-AP-I Assistant control panel ACS-AP-W Assistant control panel with a Bluetooth interface ACS-BP-S Basic control panel CDUM-01 Blank control panel cover (no control panel)	
	I/O (one slot available for I/O options)	+L501 +L523 +L537 +L512 +L500	CMOD-01 External 24 V AC/DC and digital I/O extension (2×RO and 1×DO) CMOD-02 External 24 V AC/DC and isolated PTC interface CPTC-02 ATEX-certified PTC interface, Ex II (2) GD and external 24 V. Requires also option +Q971. CHDI-01 115/230 V Digital input extension (6×DI and 2×RO) CBAI-01 Bipolar analog I/O adapter module	
	Safety	+Q971	ATEX-certified Safe Disconnection Function, Ex II (2) GD. Sold only with option +L537.	
	Fieldbus	+K451 +K454 +K457 +K458 +K462 +K469 +K470 +K490 +K491 +K492 +Q986	+K451 +K454 +K457 +K458 +K462 +K469 +K470 +K490 +K491 +K492 +Q986	FDNA-01 DeviceNet™ FPBA-01 PROFIBUS DP FCAN-01 CANopen FSCA-01 Modbus/RTU FCNA-01 ControlNet FECA-01 EtherCAT FEPL-02 Ethernet POWERLINK Two port FEIP-21 EtherNet/IP™ Two port FMBT-21 Modbus TCP Two port FPNO-21 PROFINET IO Safety functions fieldbus module FSPPS-21
	Embedded fieldbus	+CEIA-01 +EIA-485	Embedded Modbus RTU adapter (as standard)	
	IP enclosure	+B056	IP55 (UL type 12). Factory option, retrofit not possible.	
	Construction	+C135 +H358	Flange mounting kit. (Only available for 400V IP21 drives) Cable conduit plate, blank	
	Complementary options	+P931 +P932 +P952	Extended warranty up to 36 months Extended warranty up to 60 months European Union Country of origin	

Ordering information


How do I build an ordering code?

ACS580-04

The type designation tells you the specifications and configuration of the drive.

The table shows the primary drive variants.

Sample type code: ACS580-04-505A-4+XXXX

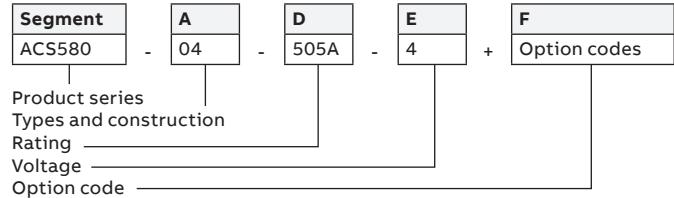

Basic codes


Segment	Option	Description
A	Construction	04 = Drive with coated circuit boards, integrated control unit (inside drive module), control panel door mounting kit, embedded Modbus RTU adapter, EIA-485 (standard), assistant control panel with USB-port, quick guides with default set of languages, web links to basic PC tool and manuals in quick guide
D	Current rating	Refer to the rating table
E	Voltage rating	4 = 380...480 V

Option codes

Segment	Option	Code	Description
F	Control panel and panel options	+J400	Assistant control panel (standard) / ACS-AP-S (+J400 is included in the standard delivery)
		+J425	Assistant control panel / ACS-AP-I (+J425 and +J404 replaces +J400 / ACS-AP-S)
		+J404	Basic control panel / ACS-BP-S (+J425 and +J404 replaces +J400 / ACS-AP-S)
		+0J427	No control panel holder and no control panel (3AXD50000016230 = Control panel mounting platform / DPMP-03)
I/O (one slot available for I/O options) (L501, L523 and L512 available as retrofit options)		+L500	CBAI-01 Bipolar analog I/O adapter module
		+L501	External 24 V DC/AC and Digital I/O extension (2xRO and 1xDO) / CMOD-01
		+L512	115/230V Digital input (6xDI and 2xRO) / CHDI-01
		+L523	External 24 V and isolated PTC interface / CMOD-02
		+L537	ATEX-certified PTC interface, Ex II (2) GD and external 24 V / CPTC-02. Requires also +Q971 option.
Safety		+Q971	ATEX-certified Safe Disconnection Function, Ex II (2) GD / CPTC-02 (+Q971 option sold only together with +L537 option)
Fieldbus (One fieldbus adapter supported. Fieldbus adapters available as loose options for retrofit.)		+K451	FDNA-01 DeviceNet™
		+K454	FPBA-01 PROFIBUS DP
		+K457	FCAN-01 CANopen
		+K458	FSCA-01 Modbus/RTU
		+K462	FCNA-01 ControlNet
		+K469	FECA-01 EtherCAT
		+K470	FEPL-02 Ethernet POWERLINK
		+K490	Two port FEIP-21 EtherNet/IP™
		+K491	Two port FMBT-21 Modbus TCP
		+K492	Two port FPNO-21 PROFINET IO
		+Q986	Safety functions fieldbus module FSPS-21
IP enclosure		+B051	IP20 Finger safe
Construction		+J410	Control panel door mounting kit (+J410 Includes DPMP-03)
		+H370	Full-size input terminals
		+P906	Remote control board
		+0H371	No full size output terminals
		+0H534	No pedestal
		+0P919	No cabinet installation ramp
Filters		+E210	EMC/RFI-filter, C3, 2 nd Environment, Unrestricted (Earthed & Unearthed Networks)
		+E208	Common mode filter
Complementary options		+P931	Extended warranty up to 36 months
		+P932	Extended warranty up to 60 months
		+P952	European Union Country of origin

ACS580-07

The type designation tells you the specifications and configuration of the drive.
The table shows the primary drive variants.
Sample type code: ACS580-07-145A-4+XXXX

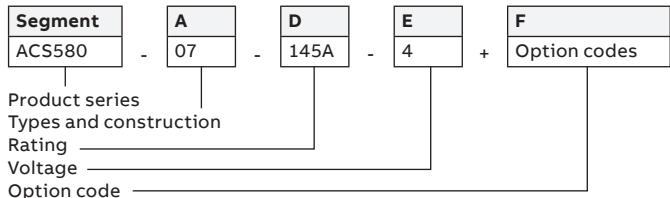**Basic codes**

Segment	Option	Description
A	Construction	07 = Cabinet-built, IP21, Main switch and aR fuses, Assistant control panel (ACS-AP-S), EMC filter C2 (R6-R9)/C3 (R10-R11), Common mode filter (R10-R11), ACS580 standard control program, Safe torque-off, Boards with coating, Bottom entry and exit of cables, Cable lead through entry, One set of default electric documents in USB stick
D	Current rating	Refer to the rating table
E	Voltage rating	4 = 380...480 V

Option codes

Segment	Option	Code	Description
F	Control panel and panel options	+J429	ACS-AP-W Assistant control panel with Bluetooth interface
	I/O (one slot available for I/O options)	+L500	CBAI-01 Bipolar analog I/O adapter module
		+L501	External 24 V DC/AC and Digital I/O extension (2xRO and 1xDI)
		+L504	Additional I/O-Terminal Block
		+L512	115/230V Digital input (6xDI and 2xRO)
		+L523	External 24 V and isolated PTC interface
		+L537	ATEX-certified thermistor protection module, Ex II (2) GD (requires ATEX-certified Safe Disconnection Function, Ex II (2) GD, add +Q971 to code)
	Safety	+Q971	ATEX-certified Safe Disconnection Function, Ex II (2) GD (+Q971 option sold only together with +L537 option. Not available with +Q951)
		+Q951	Safety option of emergency stop where Main breaker is opened during emergency
		+Q963	Safety option of emergency stop where main breaker is not opened during emergency
	Fieldbus (One fieldbus adapter supported.)	+K451	FDNA-01 DeviceNet™
		+K454	FPBA-01 PROFIBUS DP
		+K457	FCAN-01 CANopen
	Note: Embedded fieldbus interface can't be used at the same time with fieldbus adapter.	+K458	FSCA-01 Modbus/RTU
		+K462	FCNA-01 ControlNet
		+K469	FECA-01 EtherCAT
	Fieldbus adapters available as loose options for retrofit.)	+K470	FEPL-02 Ethernet POWERLINK
		+K490	Two port FEIP-21 EtherNet/IP™
		+K491	Two port FMBT-21 Modbus TCP
		+K492	Two port FPNO-21 PROFINET IO
		+Q986	Safety functions fieldbus module FSPS-21
	ABB Ability™ Condition Monitoring for drives	+K496	NETA-21 Wired remote monitoring system (Not released)
		+K497	K496 option with Wireless modem for wireless connectivity (Not released)
	IP enclosure	+B054	IP42 enclosure class (Type 1 in case of UL certification)
		+B055	IP54 enclosure class (Type 12 in case of UL certification)
	Construction	+C129	Cabinet drive is UL listed
		+C180	(not released yet) Enhanced stiffness for cabinet according to International building code 2012.
	Filters	+F250	Line contactor
		+F289	Main case circuit breaker (UL listed, requires C129 option)
	Cabling	+H351	Top entry (additional channel for frames R6-R9, +125 mm the drive cabinet width)
			Top entry through roof (frames R10-R11)
		+H353	Top exit (additional channel for frames R6-R9, +125mm the drive cabinet width)
			Top exit (frames R10-R11) – additional 150 mm channel
		+H358	Cable conduit entry (Default in US, anywhere else specify in order)
		+C164	Plinth 100 mm (separate in package)
		+C179	Plinth 200 mm (separate in package)
	Cabinet options	+G300	Cabinet heater (External supply)
		+G327	Ready Pilot light, white
		+G328	Run Pilot light, green
		+G329	Fault Pilot light, red
	Starter for auxiliary motor fan	+M600	1...1.6 A; 1PC-s, dimensioned by fan size, Includes protective devices
		+M601	1.6...2.5 A; 1PC-s, dimensioned by fan size, Includes protective devices
		+M602	2.5...4 A; 1PC-s, dimensioned by fan size, Includes protective devices
		+M603	4...6.3 A; 1PC-s, dimensioned by fan size, Includes protective devices
		+M604	6.3...10 A; 1PC-s, dimensioned by fan size, Includes protective devices
		+M605	10...16 A; 1PC-s, dimensioned by fan size, Includes protective devices
	Complementary options	+P931	Extended warranty up to 36 months
		+P932	Extended warranty up to 60 months



Notes

Notes



For more information, please contact
your local ABB representative or visit

new.abb.com/drives/ACS580

new.abb.com/drives

new.abb.com/drives/drivespartners

new.abb.com/motors-generators

Online manuals
for the ACS580 drives



Video playlist:
ACS580 how-to videos

